

LATOUR ZOOM PRO


Zoomable, accentuating varied sizes of objects with adjustable beam angle. Less than 25% attenuation of center light intensity from 15° to 45°. Provide flexible and precise lighting for museums and galleries. It is designed for artwork, its versatility can fully meet the varieties of museum lighting demands.

PAGE. 07

LATOUR ZOOM

The light beam diameter can be infinitely adjusted from spot (10°) to wide flood (60°) by changeable beam angle and stretchable structure. Zoom spotlight is especially suitable for the area lighting of Art Gallery.

PAGE. 09

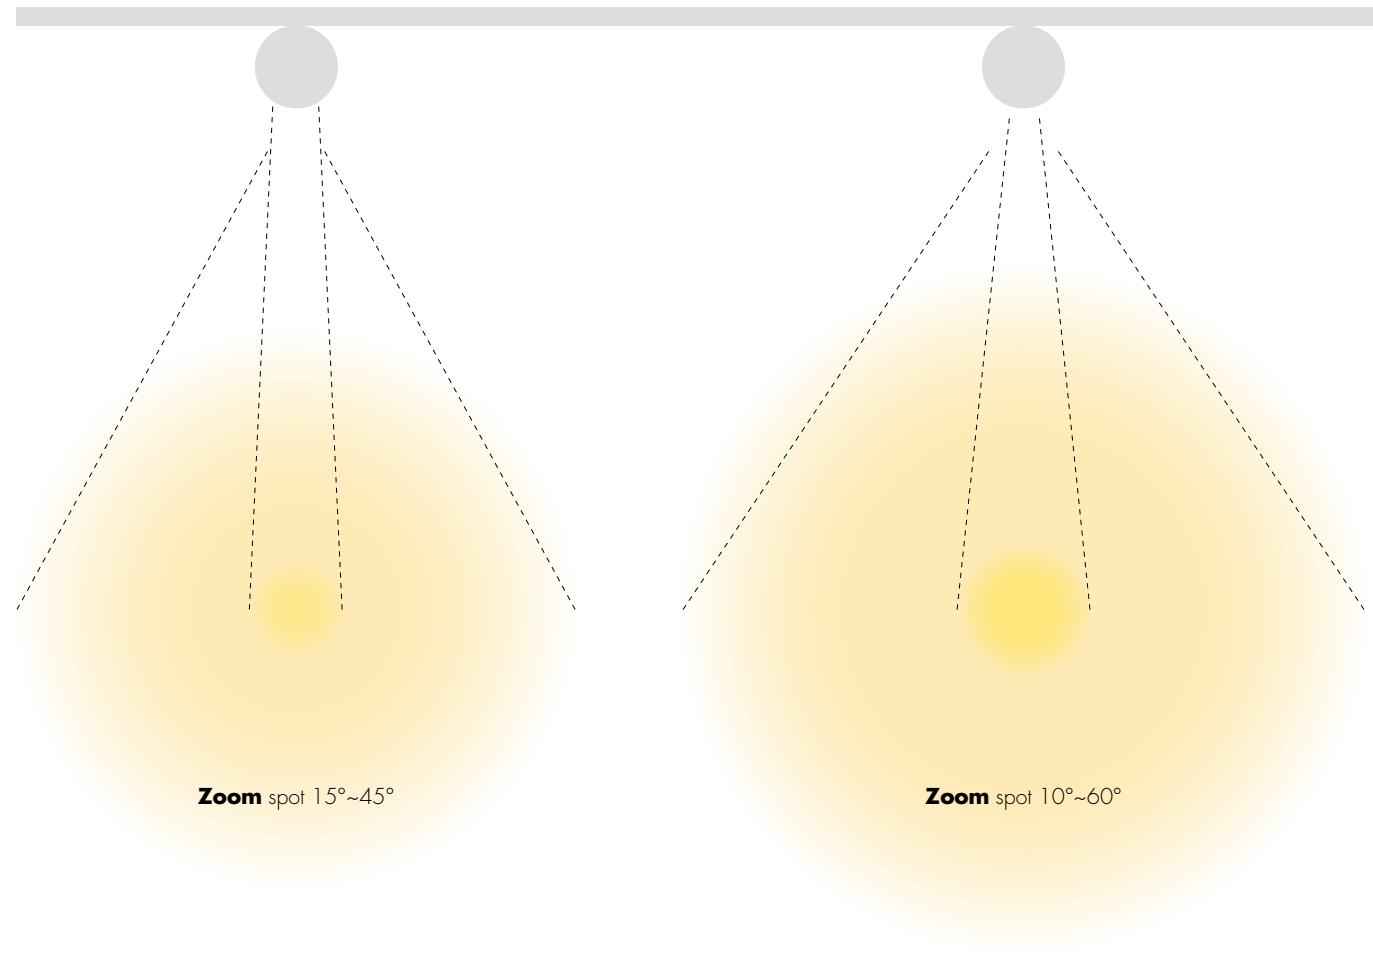

Optical Accessories

The zoomable structure allows the optic to be adjusted for your any project requirements, thereby achieving highly professional lighting effects.

The damping lens, reconciles any lighting spot. The Honey Comb Louvre, keeps an excellent control for ultimate glare at a desirable level.



Honey Comb Louvre

Reduce glaring at a desirable level.





Linear Spread

Provide stretching light shape for rectangular object.

Easy Dim

0-100% dimming by an individual dimming switch. From bright to dark, easy to reach its effect, and lower lighting commissioning cost.

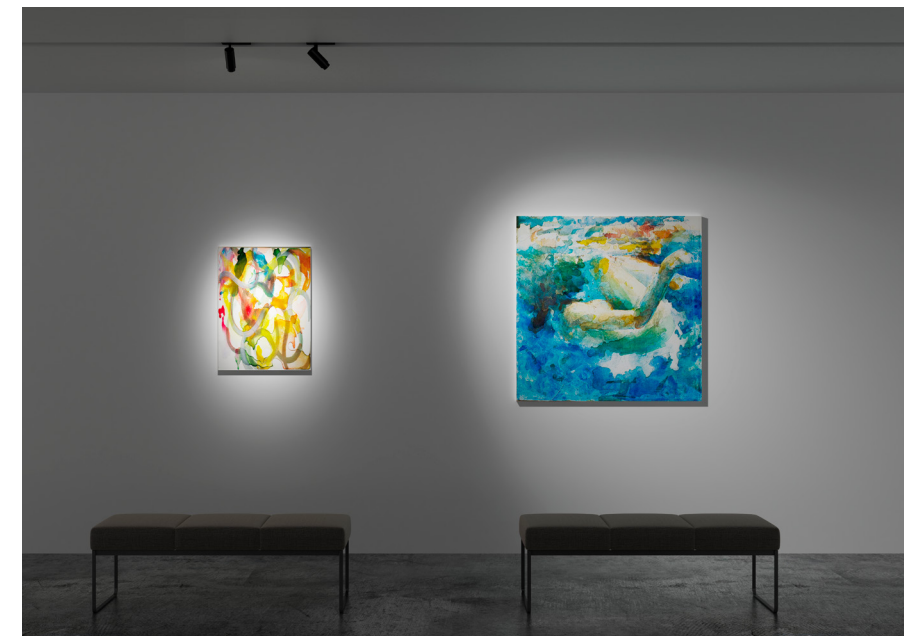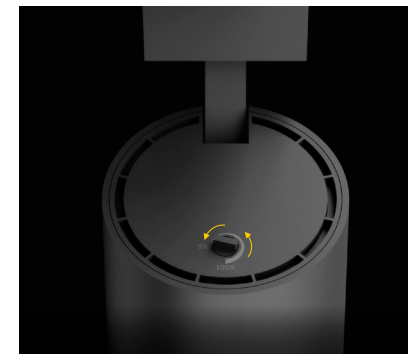




General Information

| | TSL060B track | TSL070B track | TSL080B track | SAL060B surface |
|---------------------------|-------------------------|-------------------------|-------------------------|---------------------------|
| Optics | 15°~45° Zoomable | 15°~30° Zoomable | 15°~30° Zoomable | 15°~45° Zoomable |
| System Power (Watt) | 9W | 20W | 30W | 9W |
| System Luminous flux (lm) | 530lm | 1100lm | 1550lm | 530lm |
| Driver parameters | 36V/210mA | 36V/480mA | 36V/700mA | 36V/210mA |
| Individual dimmable | ● | ● | ● | ● |

Technical Details


| | |
|--------------------|--|
| Light Source | LED COB |
| Colour temperature | 2700K/3000K/4000K |
| CRI (Ra/R9) | RA>90/R9>50 |
| Colour Consistency | SDCM<3 |
| UGR | <13 |
| IP-rated | IP20 |
| Lifetime | >50,000h |
| Warranty | 3 Years/5 Years |
| Driver | ON/OFF, Phase, 0-10V, Dali |
| Options | 2-Wire 1-Circuit Track / 3-Wire 1-Circuit Track / 4-Wire 3-Circuit Track / 6-Wire 3-Circuit Dali Track |

Dimensions (mm)

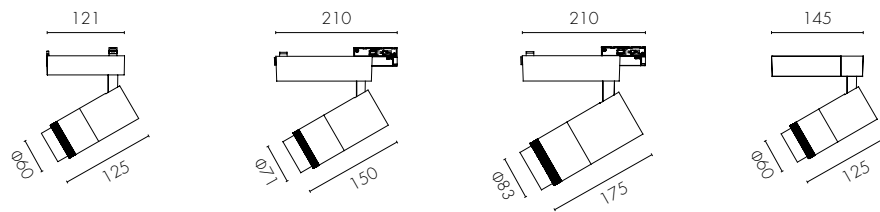


PHOTOMETRIC


TSL060B 9W

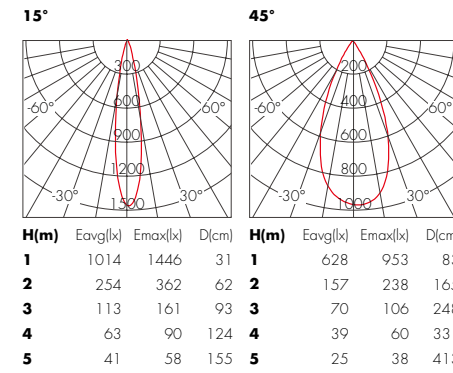


TSL070B 20W

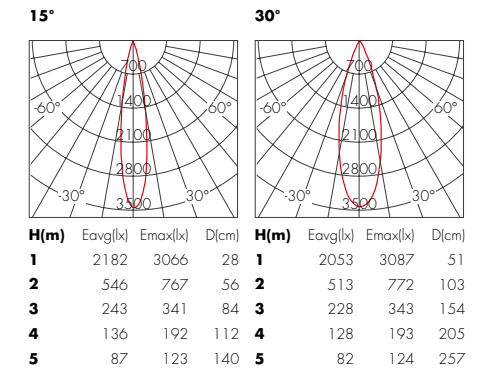



TSL080B 30W

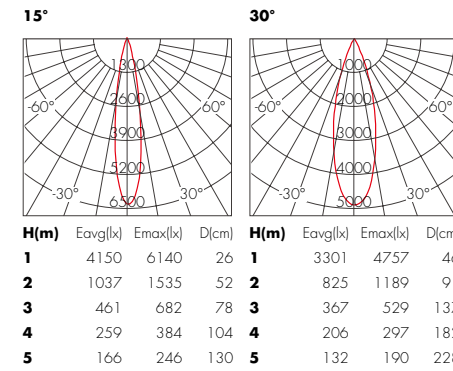

SAL060B 9W

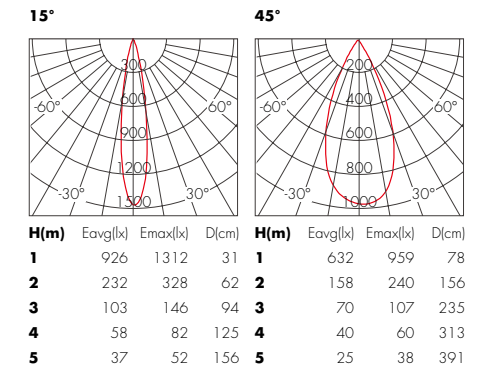

Accessories



Honey comb louvre Linear Spread

Finishes



White Black Titanium