

LATOUR

Excellent glare-control


The main body is made of high density die-cast aluminum. Low-glare and a wide variety of optical accessories are the key features of this series.

Latour Standard has been designed for installation on track and ceiling.

Suitable for high-end restaurants, retail shops, galleries and museums.

PAGE. 11

Standard

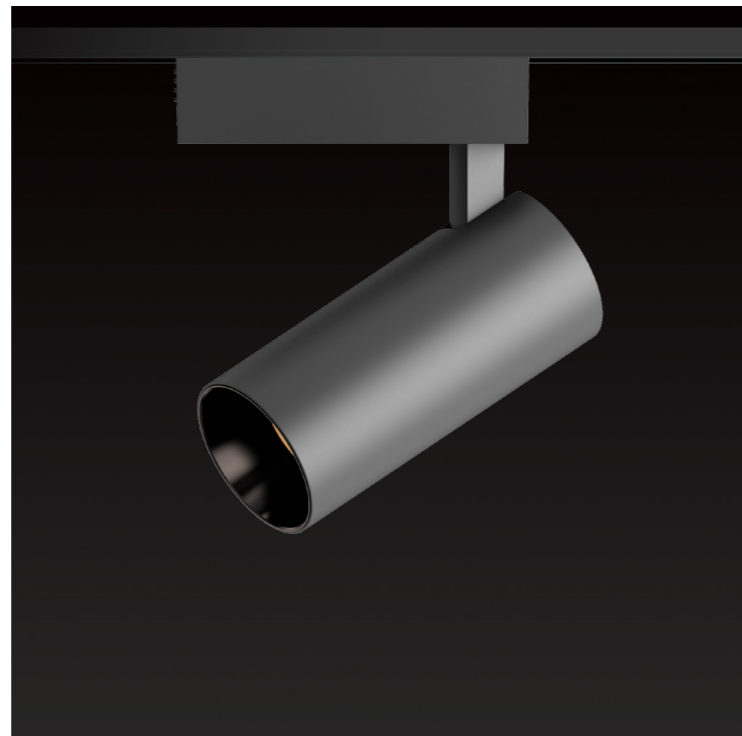



Slim

Compact & Aesthetic design

The integral cylinder shape leaves the visual impression of ultra minimalism. The deep concave structure provides excellent glare control.

PAGE. 13

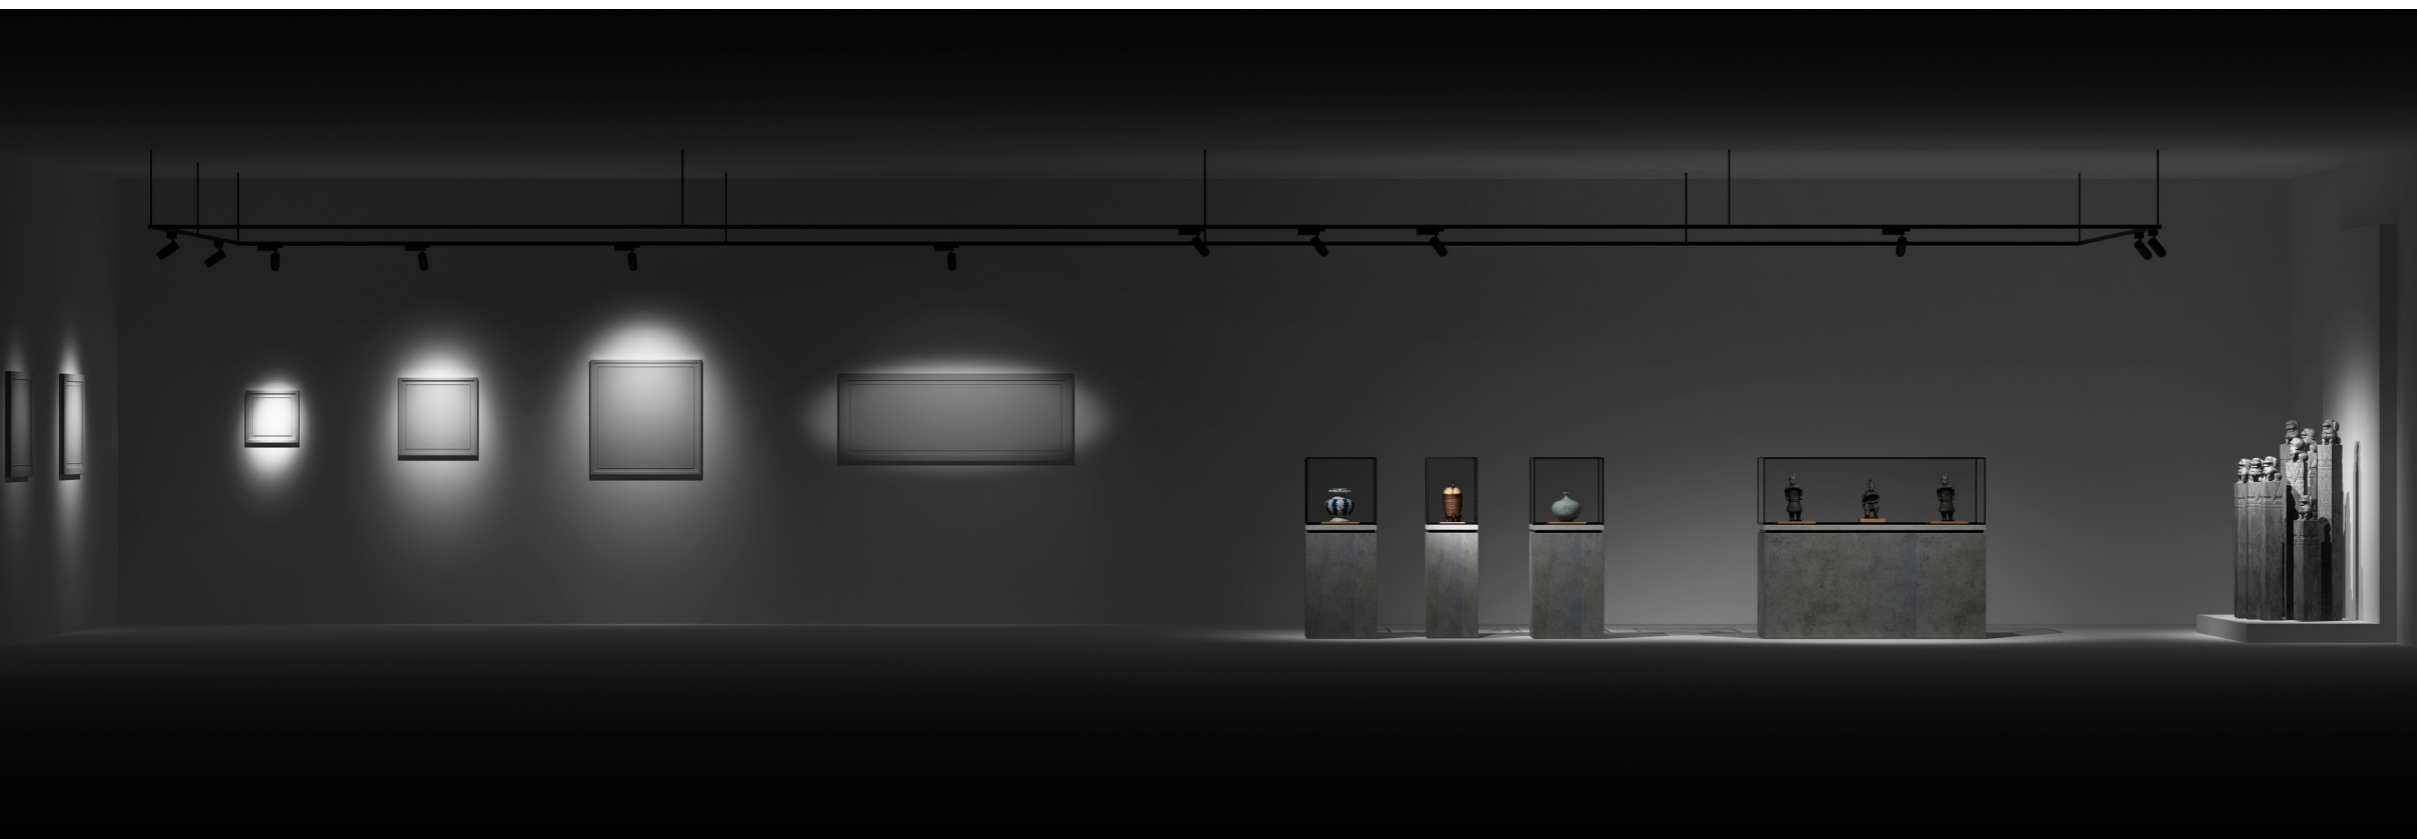

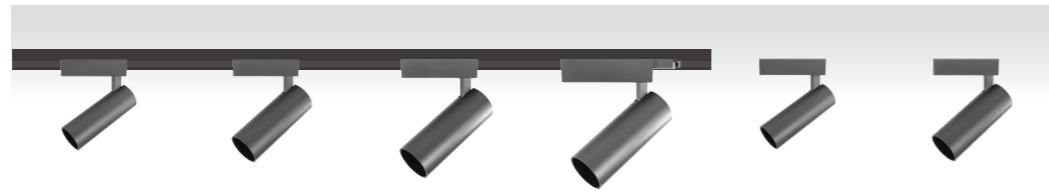


	TSL050X track	TSL060X track	TSL070X track	TSL080X track	SAL050X surface	SAL060X surface
General Information						
Optics	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°
System Power (Watt)	9W	15W	20W	30W	9W	15W
System Luminous flux (lm)	650lm	1000lm	1500lm	1750lm	650lm	1000lm
Driver parameters	36V/210mA	36V/360mA	36V/480mA	36V/700mA	36V/210mA	36V/360mA
Individual dimmable		●	●	●		●

Technical Details


Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistency	SDCM<3
UGR	<16
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali
Options	2-Wire 1-Circuit Track / 3-Wire 1-Circuit Track / 4-Wire 3-Circuit Track / 6-Wire 3-Circuit Dali Track

Dimensions (mm)

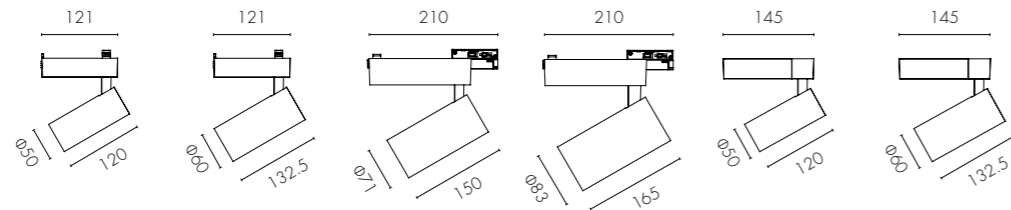


PHOTOMETRIC


TSL050X 9W

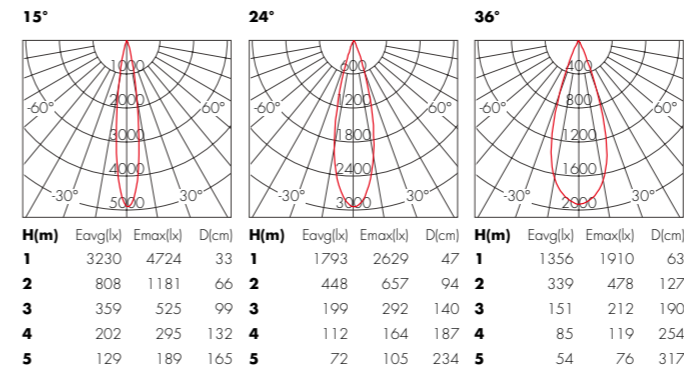


TSL060X 15W

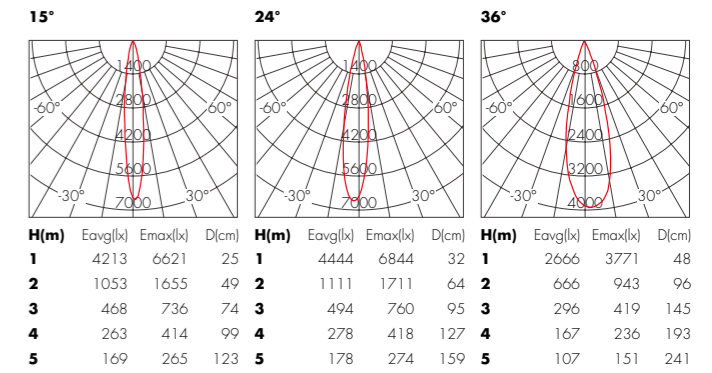


TSL070X 20W

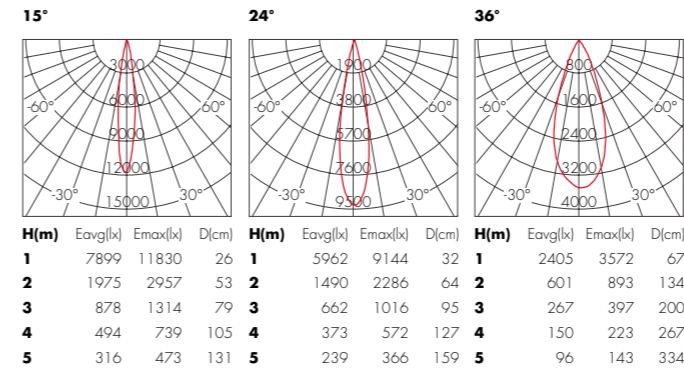


TSL080X 30W

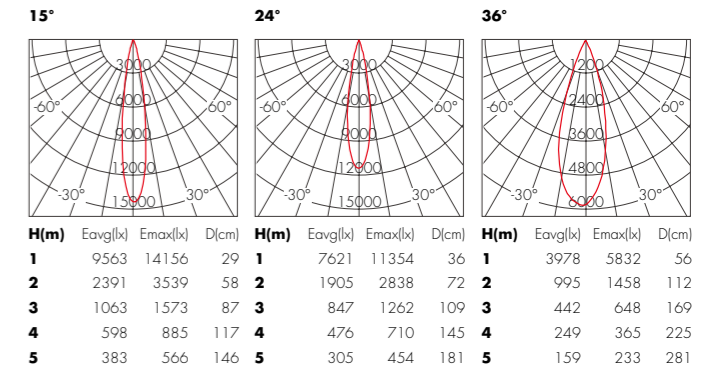



SAL050X 9W

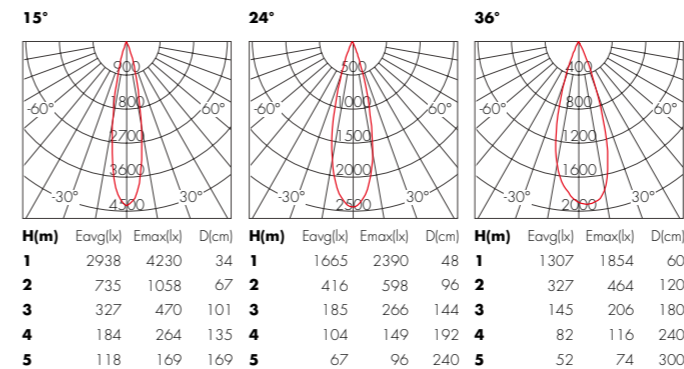

SAL060X 15W

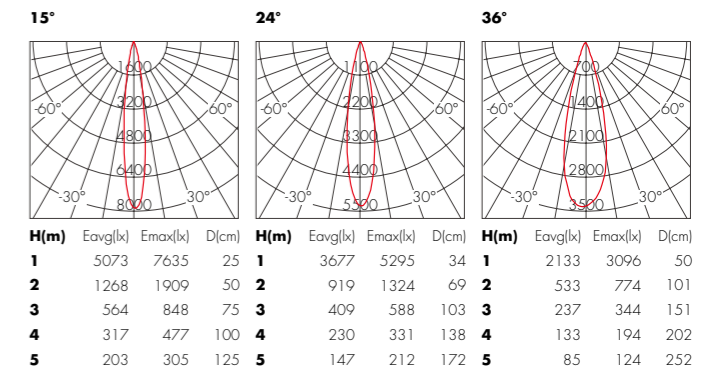

Accessories



Honey comb louvre Linear Spread

Finishes



White Black Titanium