

# LATOOR

## Excellent glare-control


The main body is made of high density die-cast aluminum. Low-glare and a wide variety of optical accessories are the key features of this series.

Latour Standard has been designed for installation on track and ceiling.

Suitable for high-end restaurants, retail shops, galleries and museums.

PAGE. 11

# Standard

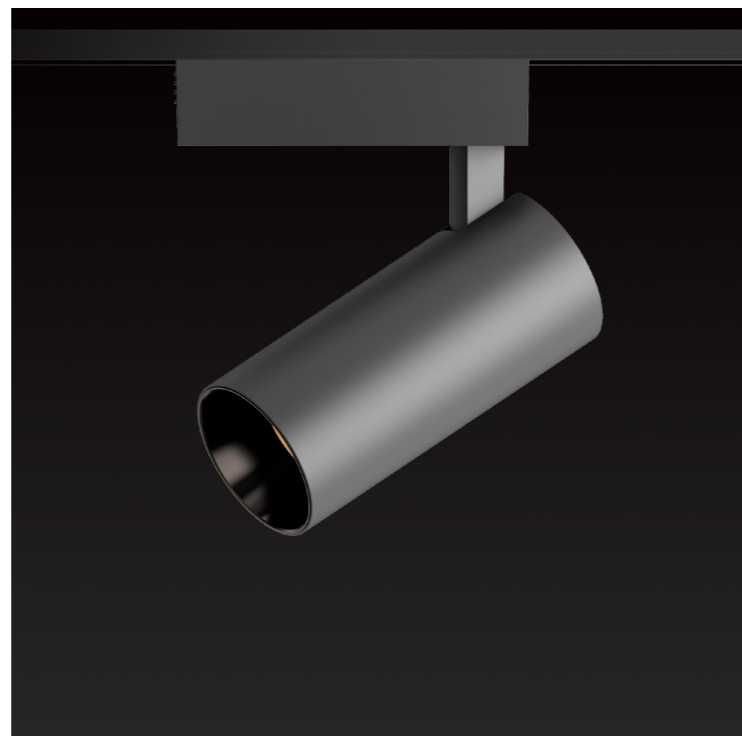



# Slim

## Compact & Aesthetic design

The integral cylinder shape leaves the visual impression of ultra minimalism. The deep concave structure provides excellent glare control.

PAGE. 13

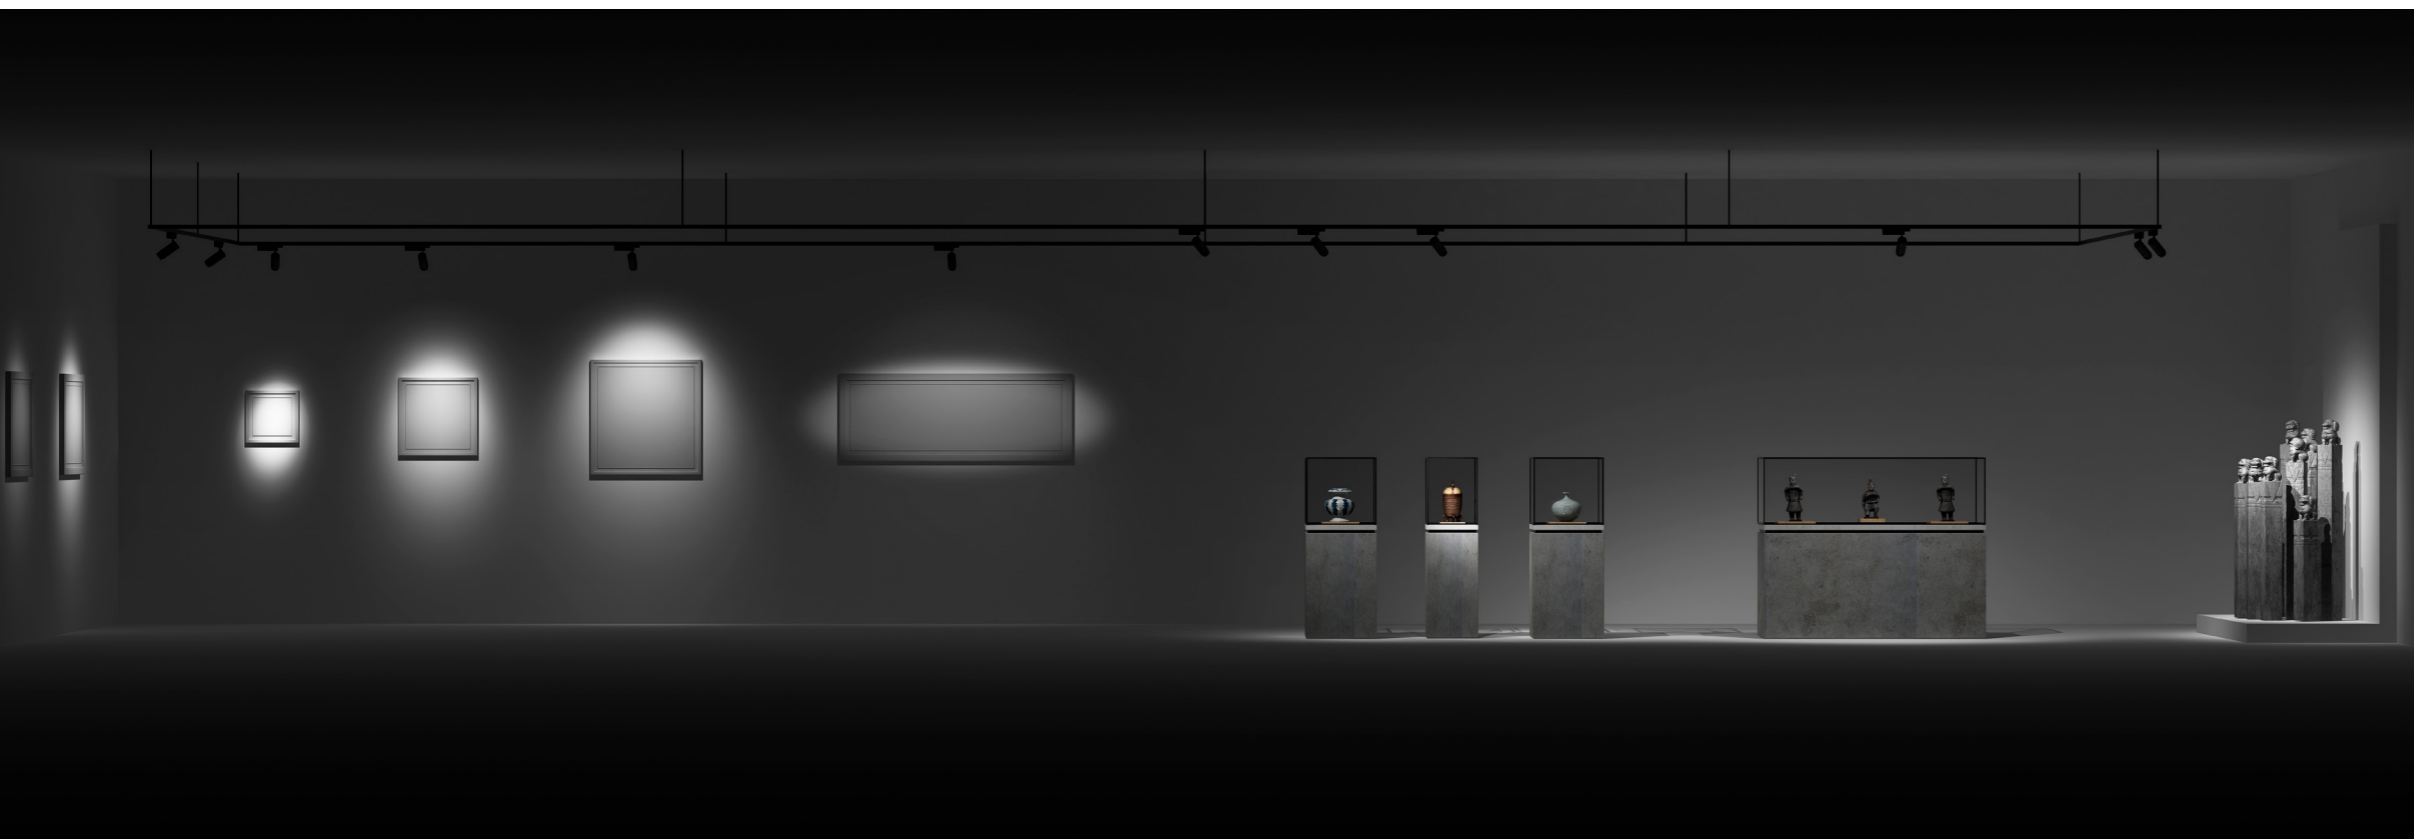

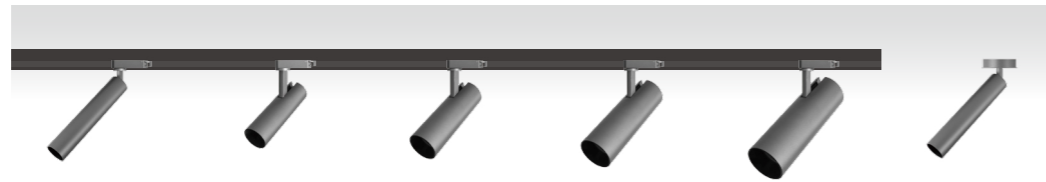


**General Information**

	TSL040X track	TSL050A track	TSL060A track	TSL070A track	TSL080A track	SAL040X surface
Optics	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°
System Power (Watt)	<b>7W</b>	<b>9W</b>	<b>15W</b>	<b>20W</b>	<b>30W</b>	<b>7W</b>
System Luminous flux (lm)	290lm	650lm	1000lm	1500lm	2300lm	290lm
Driver parameters	24V/230mA	36V/210mA	36V/360mA	36V/480mA	36V/700mA	24V/230mA



**Technical Details**

Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistency	SDCM<3
UGR	<16
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali
Options	2-Wire 1-Circuit Track / 3-Wire 1-Circuit Track / 4-Wire 3-Circuit Track / 6-Wire 3-Circuit Dali Track

**Dimensions (mm)**

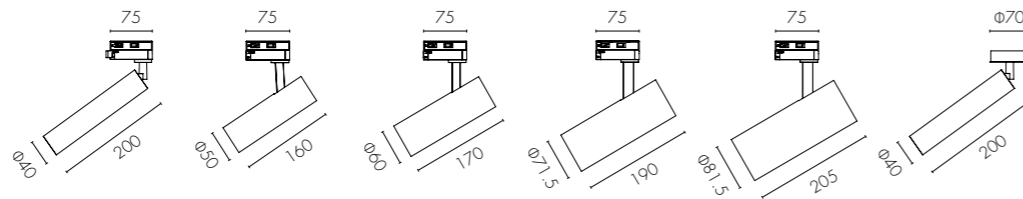

**Accessories**



Honey comb louvre Linear Spread


**Finishes**




White Black Titanium

PHOTOMETRIC


**TSL040X 7W**

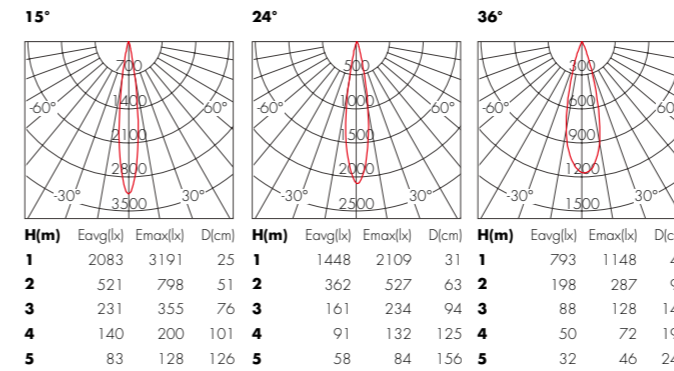


**TSL050A 9W**

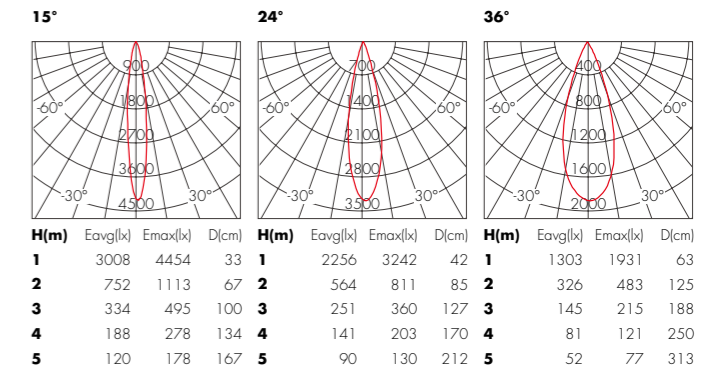


**TSL060A 15W**

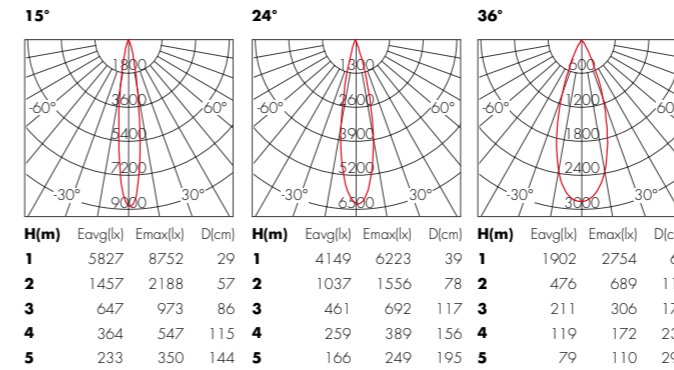

**TSL070A 20W**

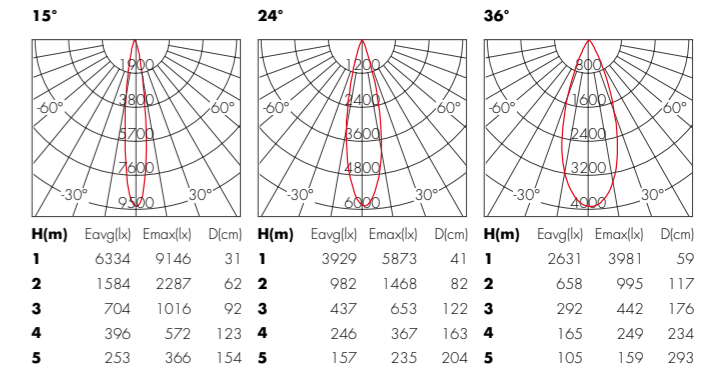

**TSL080A 30W**

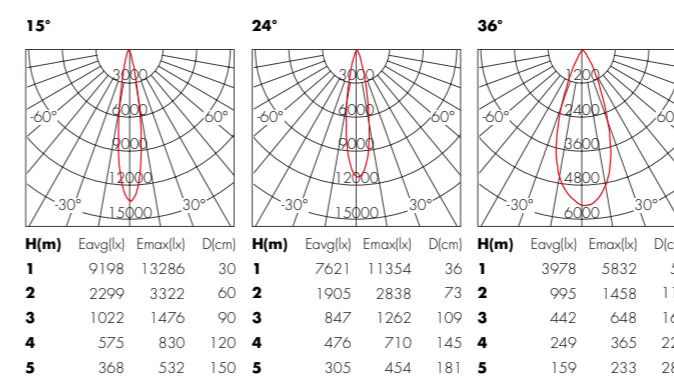

**SAL040X 7W**

