



## JOINT


- IP20 / IP54 is in an option to meet different installation location and application.
- Less stray light from the light cone to make an ultimate visual comfort and control effect of UGR < 10.
- Diverse options for additional light distributions, adapted spectra and greater visual comfort.





**Modular LED engine**

Interchangeable modular design for projects maintenance and flexibility.  
Optional interchangeable reflector includes darklight reflector, pinhole, scallop wallwasher reflector for different lighting requirements.

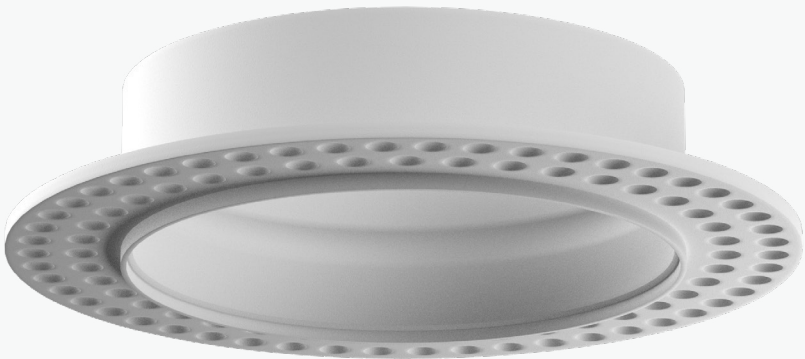

**High power downlight in recessed & trimless**

Made in cold forging aluminum, Joint is well-designed with excellent heat-dissipated properties.  
The lumen output of this series is exceptional.  
The UGR of Joint is below 10.  
Versions of IP20/IP54 are available to address different project requirements.






|                           |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
|---------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                           |  |  |  |  |  |  |
|                           | DDX075C                                                                           | DSX075C                                                                           | DTX075A                                                                           | DTX075T                                                                            | DDX075O                                                                             | DSX075Y                                                                             |
|                           | recessed                                                                          | recessed                                                                          | recessed                                                                          | recessed                                                                           | recessed                                                                            | recessed                                                                            |
| General Information       |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |
| Optics                    | 15°/24°/36°<br>Fixed                                                              | 15°/24°/36°<br>Adjustable                                                         | 15°/24°/36°<br>wall washing                                                       | 15°/24°/36°<br>Adjustable                                                          | 15°/24°/36°<br>Fixed                                                                | 60°<br>Uniform Wallwasher                                                           |
| System Power (Watt)       | 15W/20W                                                                           | 15W/20W                                                                           | 15W/20W                                                                           | 15W/20W                                                                            | 15W/20W                                                                             | 15W/20W                                                                             |
| System Luminous flux (lm) | 1200lm/1600lm                                                                     | 1200lm/1600lm                                                                     | 950lm/1300lm                                                                      | 800lm/1100lm                                                                       | 720lm/950lm                                                                         | 900lm/1200lm                                                                        |
| Driver parameters         | 36V/(360mA/480mA)                                                                 | 36V/(360mA/480mA)                                                                 | 36V/(360mA/480mA)                                                                 | 36V/(360mA/480mA)                                                                  | 36V/(360mA/480mA)                                                                   | 36V/(360mA/480mA)                                                                   |
| Cut out (mm)              | Φ75                                                                               | Φ75                                                                               | Φ75                                                                               | Φ75                                                                                | Φ75                                                                                 | Φ75                                                                                 |



Technical Details

|                    |                            |
|--------------------|----------------------------|
| Light Source       | LED COB                    |
| Colour temperature | 2700K/3000K/4000K          |
| CRI (Ra/R9)        | RA>90/R9>50                |
| Colour Consistancy | SDCM<3                     |
| UGR                | <16                        |
| IP-rated           | IP20/IP54                  |
| Lifetime           | >50,000h                   |
| Warranty           | 3 Years/5 Years            |
| Driver             | ON/OFF, Phase, 0-10V, Dali |

Dimensions (mm)

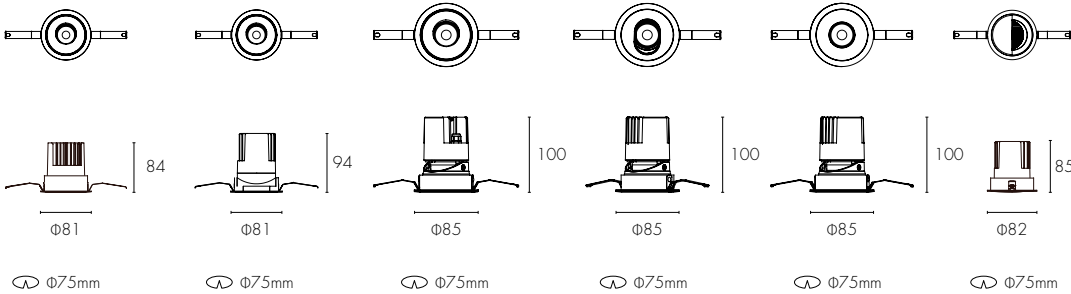

Accessories




Honey comb louvre Prismatic Spread

Finishes




White Black Chrome


DDX075C 15W

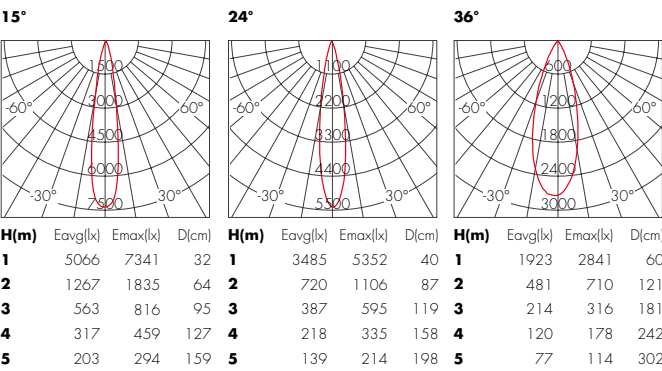


DSX075C 15W

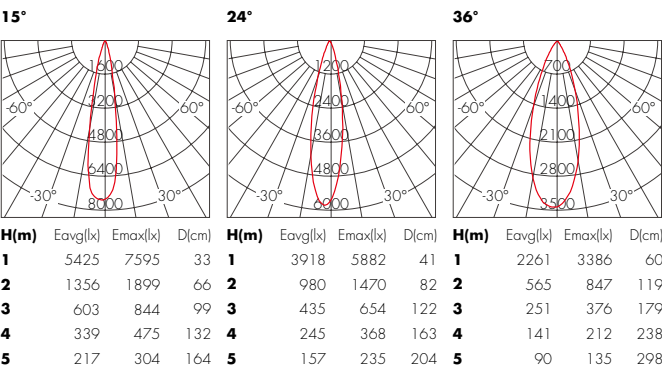


DTX075A 15W

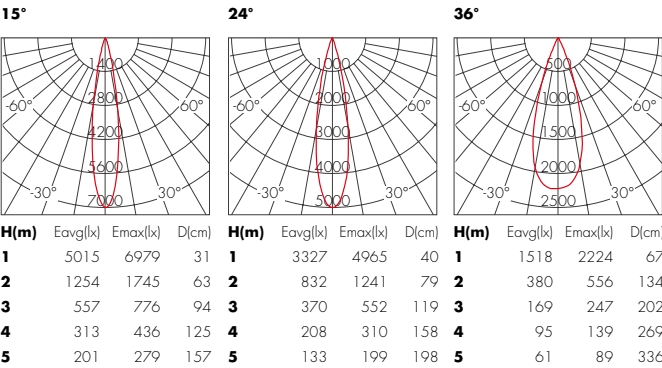


DTX075T 15W

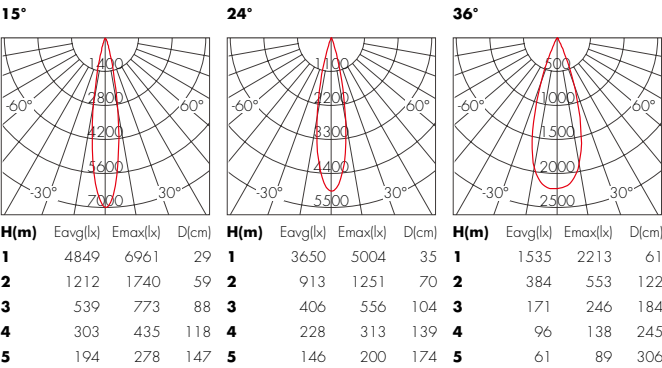

DDX075O 15W

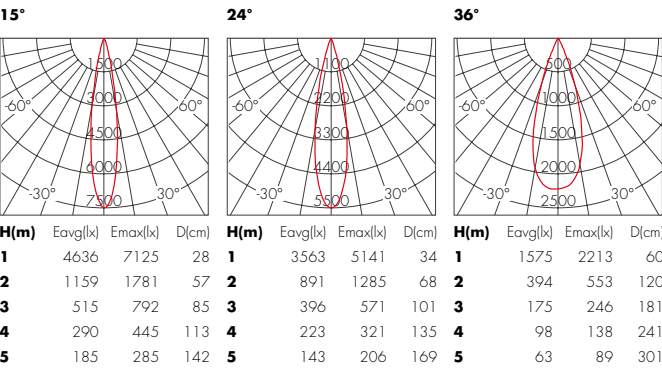

DSX075Y 20W

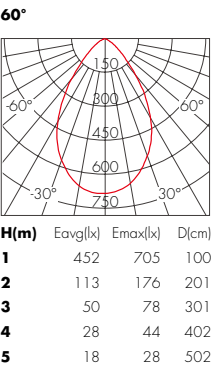


|                           |                                                                                   |                                                                                   |                                                                                     |
|---------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                           |  |  |  |
|                           | <b>DTX075W</b><br>trimless                                                        | <b>DTX075D</b><br>trimless                                                        | <b>DDX075D</b><br>trimless                                                          |
| General Information       |                                                                                   |                                                                                   |                                                                                     |
| Optics                    | 15°/24°/36°<br>wall washing                                                       | 15°/24°/36°<br>Adjustable                                                         | 15°/24°/36°<br>Fixed                                                                |
| System Power (Watt)       | <b>15W/20W</b>                                                                    | <b>15W/20W</b>                                                                    | <b>15W/20W</b>                                                                      |
| System Luminous flux (lm) | 950lm/1300lm                                                                      | 800lm/1100lm                                                                      | 720lm/950lm                                                                         |
| Driver parameters         | 36V/(360mA/480mA)                                                                 | 36V/(360mA/480mA)                                                                 | 36V/(360mA/480mA)                                                                   |
| Cut out (mm)              | Φ75                                                                               | Φ75                                                                               | Φ75                                                                                 |



Technical Details

|                    |                            |
|--------------------|----------------------------|
| Light Source       | LED COB                    |
| Colour temperature | 2700K/3000K/4000K          |
| CRI (Ra/R9)        | RA>90/R9>50                |
| Colour Consistancy | SDCM<3                     |
| UGR                | <16                        |
| IP-rated           | IP20/IP54                  |
| Lifetime           | >50,000h                   |
| Warranty           | 3 Years/5 Years            |
| Driver             | ON/OFF, Phase, 0-10V, Dali |

Dimensions (mm)

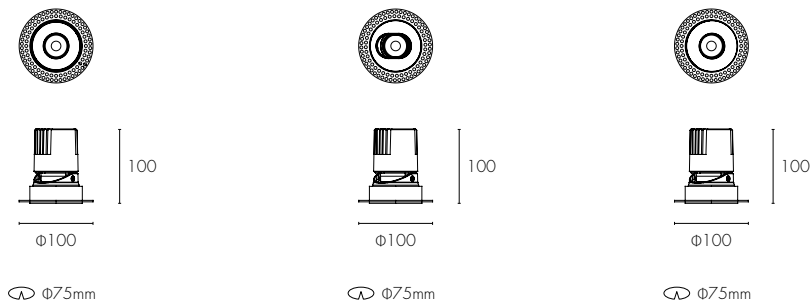

Accessories



Honey comb louvre    Prismatic Spread


Finishes




White    Black    Chrome

PHOTOMETRIC

DTX075W 15W

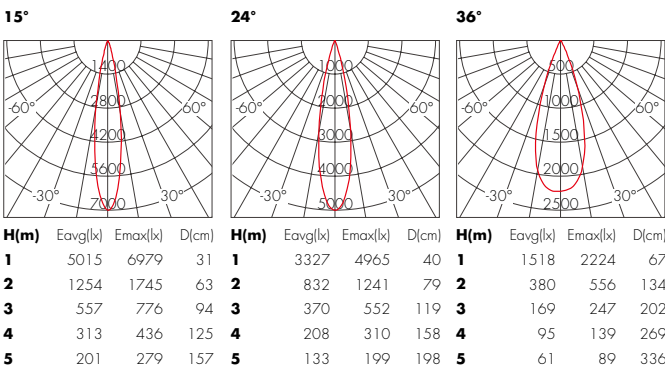

DTX075D 15W

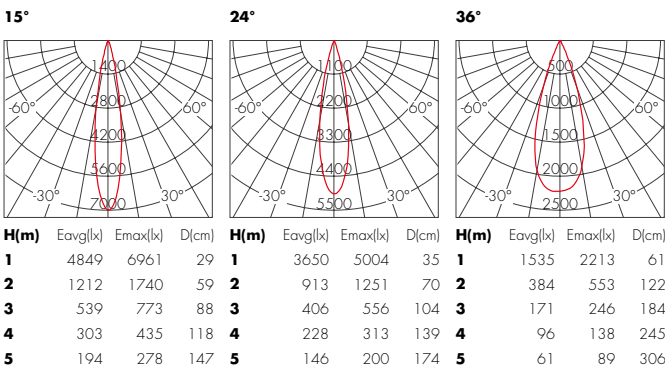

DDX075D 15W

