




GLORY

- Modular structure is designed for quick and easy installation.
- With premium light source, efficacy of the module can be up to 100lm/W.
- Heat-sink made of die-cast aluminum, with excellent heat dissipation effect.
- Reflector made by PC material, processed through precise injection and surface vacuum plating.
- Control gear options: on/off, Dali, 0-10V, phase dimming.

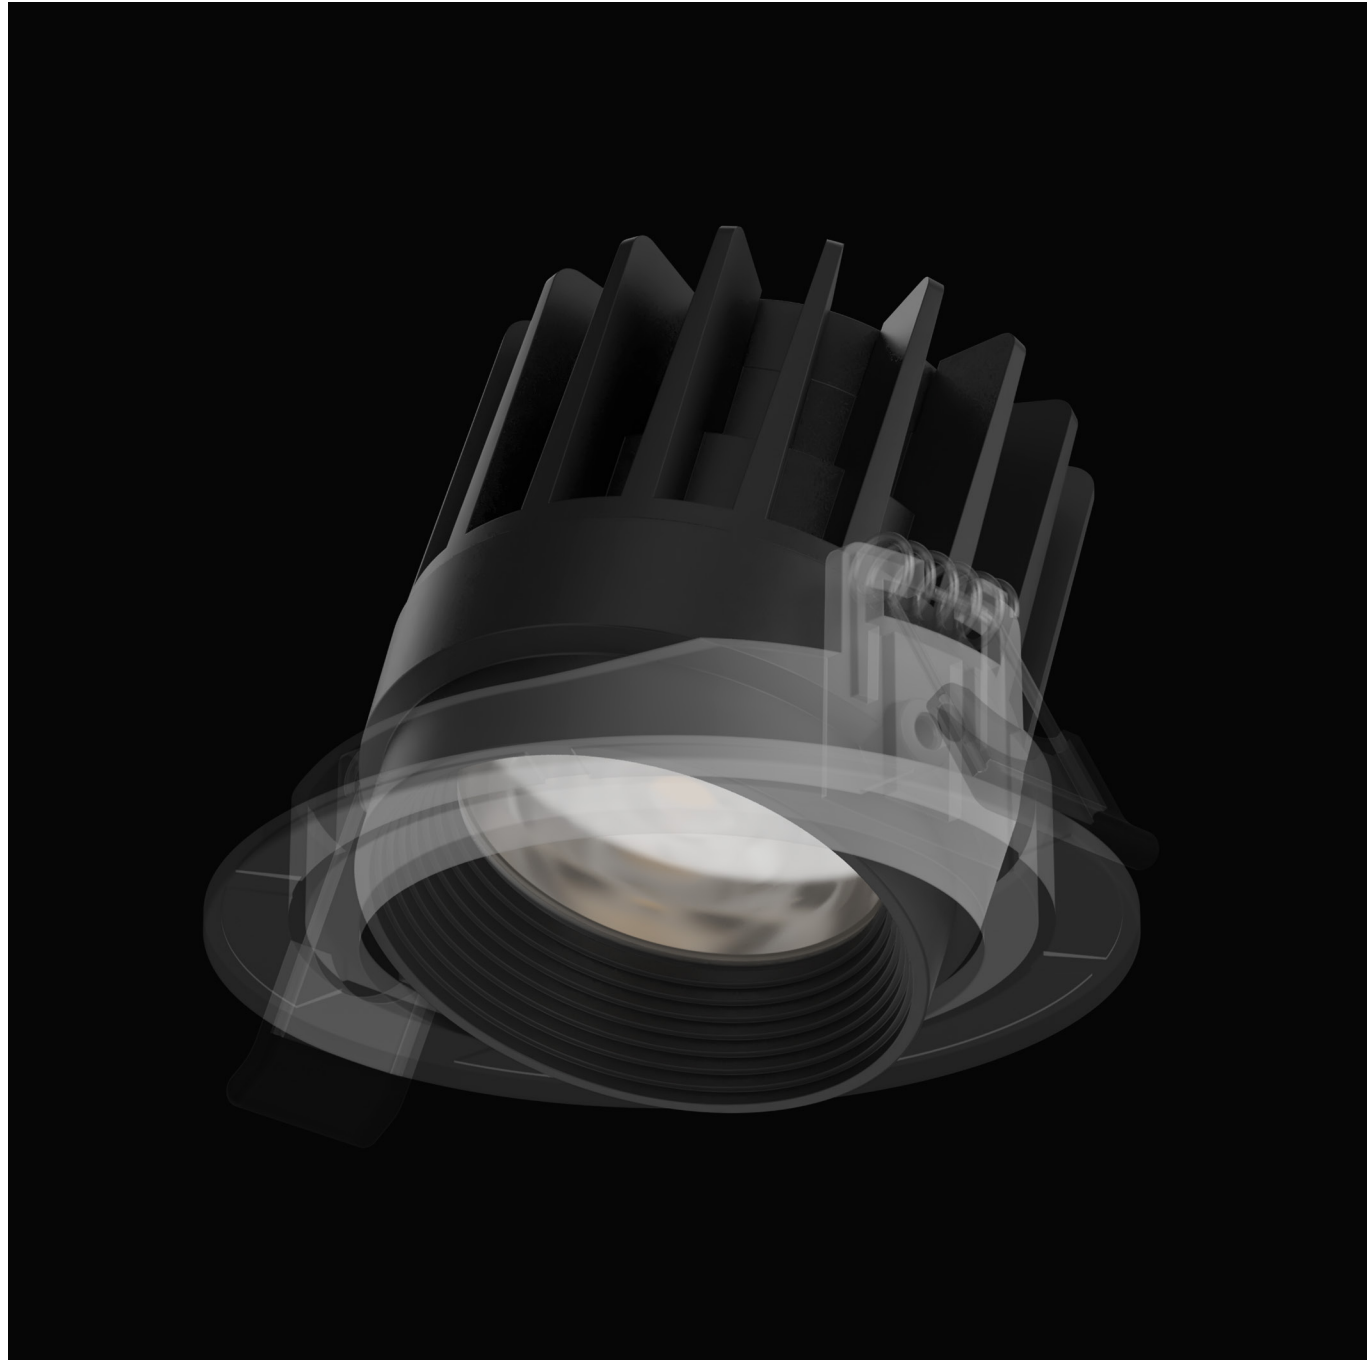


				
	DSB065X recessed	DSB075X recessed	DSB095X recessed	DSB120X recessed
General Information				
Optics	15°/24°/40° Adjustable	15°/24°/40° Adjustable	15°/24°/40° Adjustable	15°/24°/40° Adjustable
System Power (Watt)	7W	9W	16W	30W
System Luminous flux (lm)	345lm	525lm	1200lm	2400lm
Driver parameters	36V/160mA	36V/210mA	36V/390mA	36V/700mA
Cut out (mm)	Φ65	Φ75	Φ95	Φ120


Technical Details

Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistancy	SDCM<3
UGR	<16
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali

Dimensions (mm)

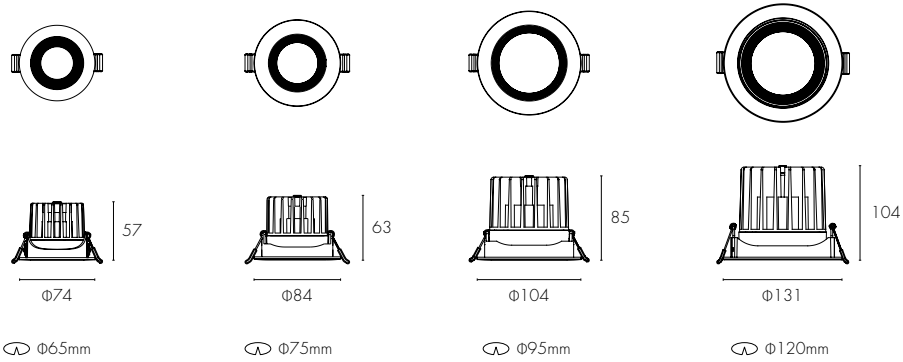


Finishes




PHOTOMETRIC


DSB065X 7W

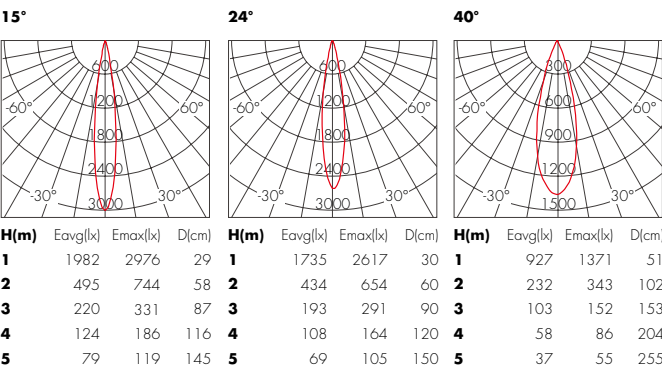

DSB075X 9W

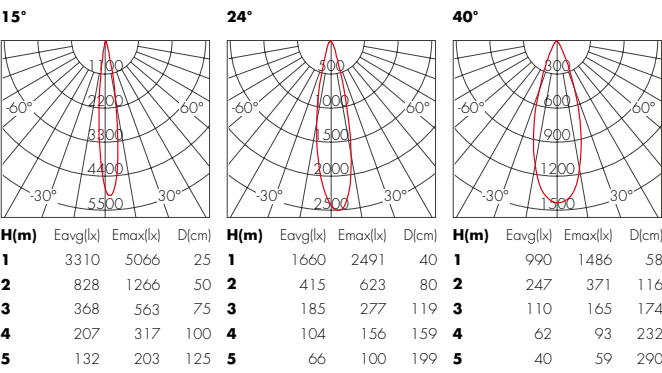

DSB095X 16W

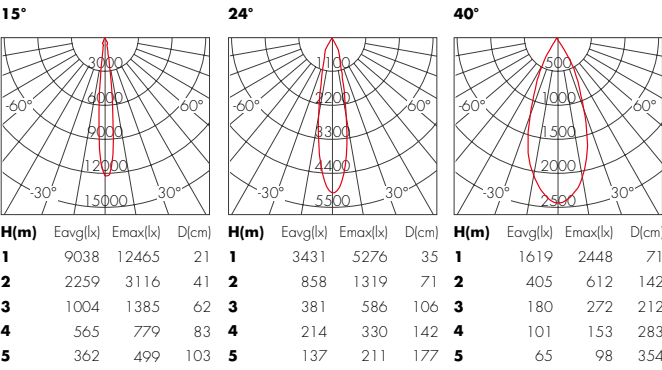

DSB120X 30W

