




ART

- The structure of light source modular to allows tools-free for convenient maintenance.
- The basic wall-washing function can meet the needs of household and commercial areas. Integrated LED engine with high-quality optical lens.
- Economic low-glare solutions with high performance.
- Varied baffles are available for different architectural requirements.

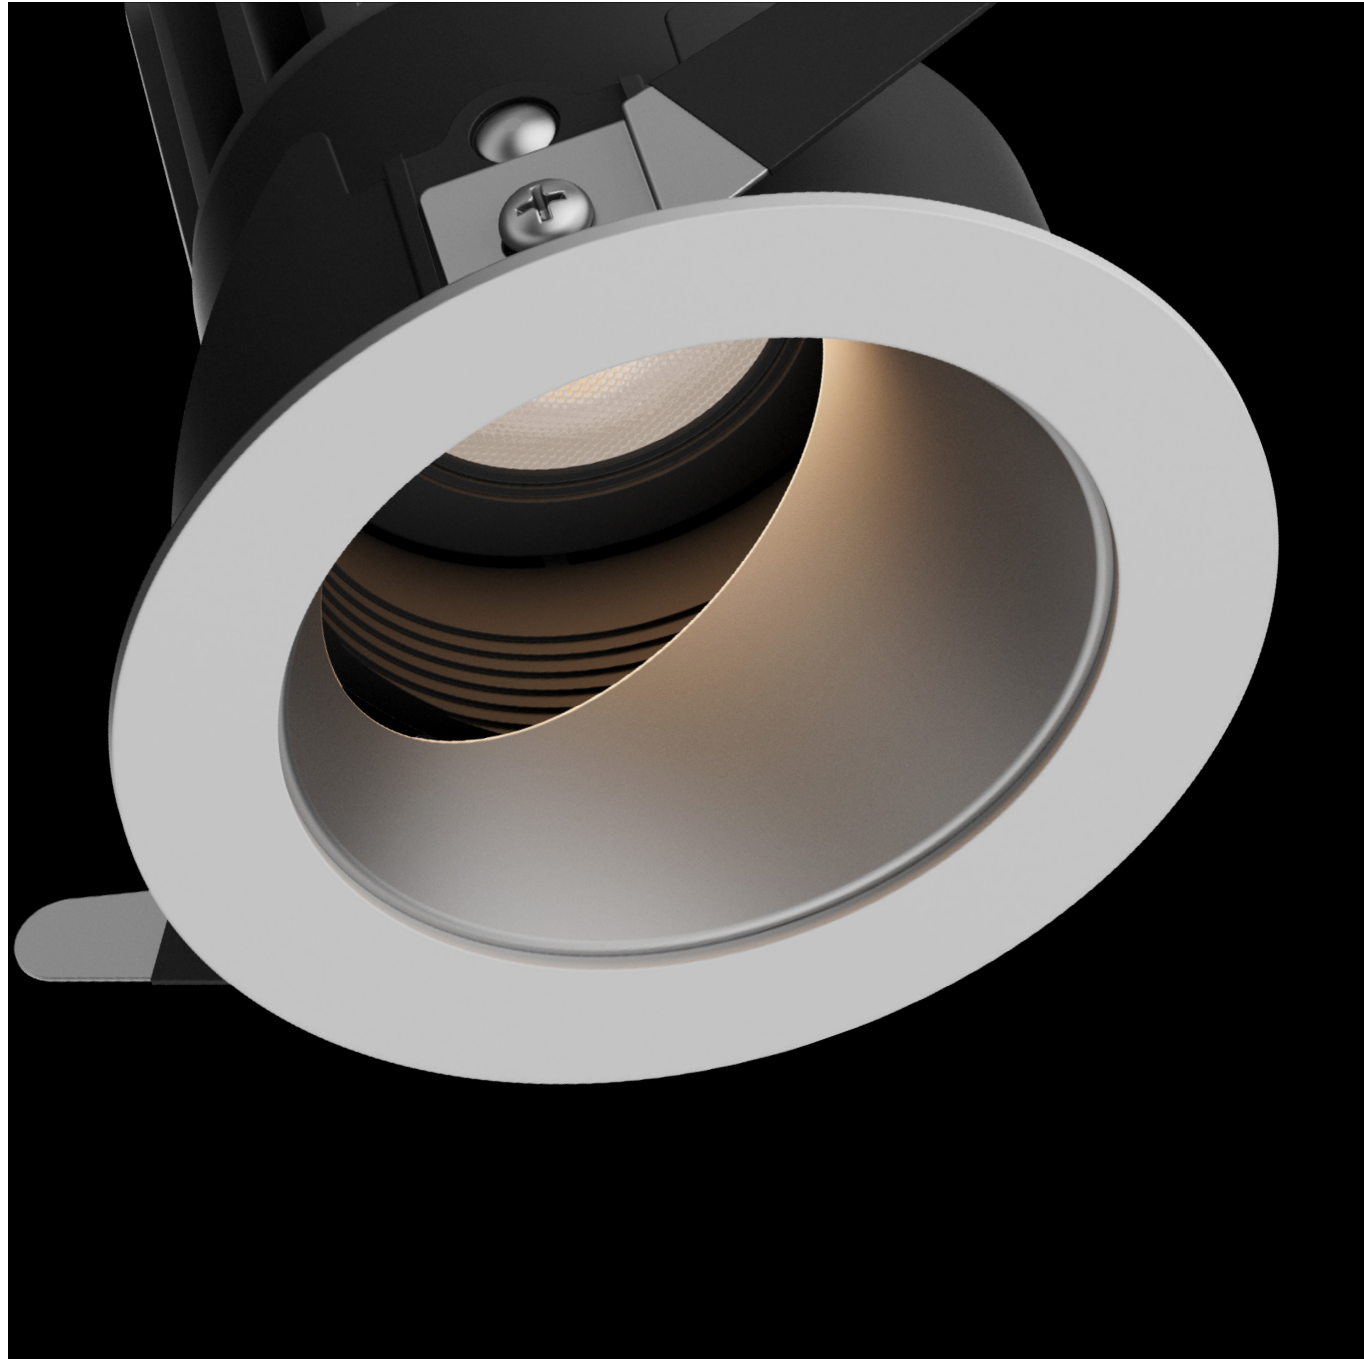


				
	DDH0750 recessed	DSH075T recessed	DDH075A recessed	DSH075X recessed
General Information				
Optics	15°/24°/40° Fixed	15°/24°/40° Adjustable	15°/24°/40° Fixed	15°/24°/40° Adjustable
System Power (Watt)	7W/9W	7W/9W	7W/9W	7W/9W
System Luminous flux (lm)	250lm/320lm	250lm/320lm	400lm/450lm	370lm/420lm
Driver parameters	36V/(160mA/210mA)	36V/(160mA/210mA)	36V/(160mA/210mA)	36V/(160mA/210mA)
Cut out (mm)	Φ75	Φ75	Φ75	Φ75


Technical Details

Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistancy	SDCM<3
UGR	<16
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali

Dimensions (mm)

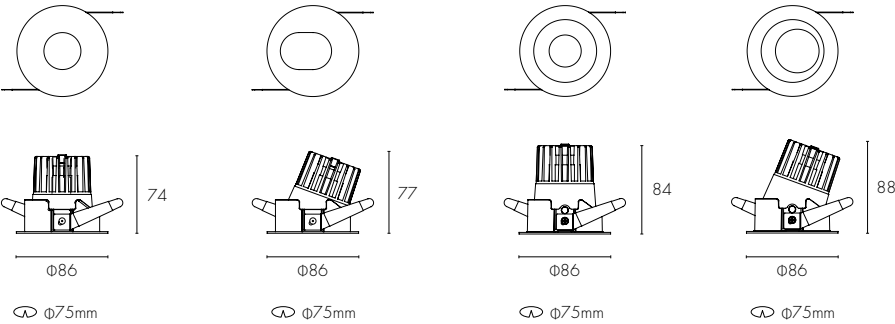


Finishes




PHOTOMETRIC


DDH0750 7W

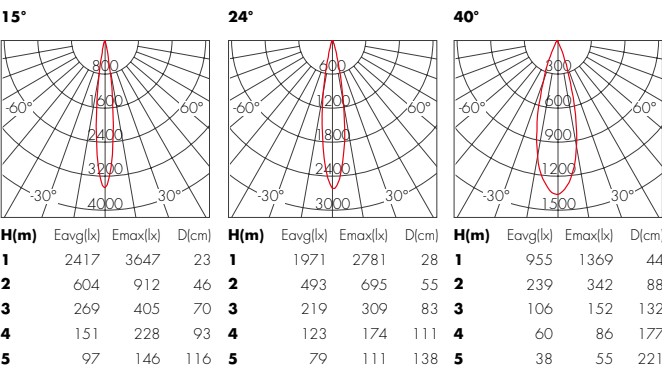

DSH075T 7W

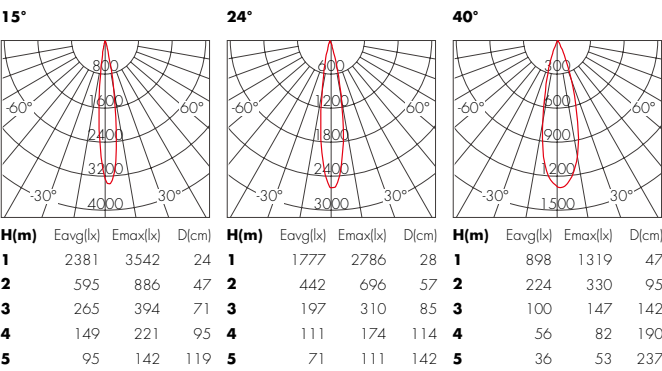

DDH075A 7W

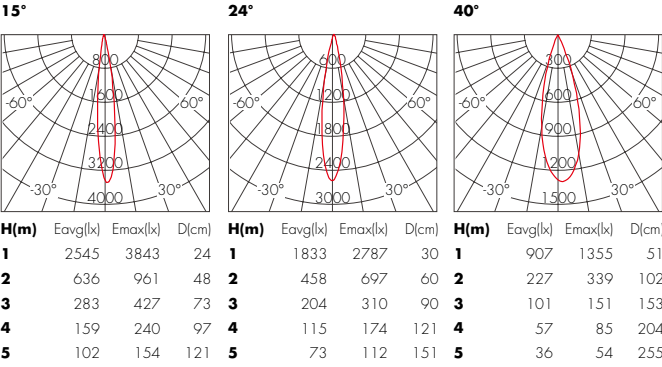

DSH075X 7W

