



LYNX Glory

- Lynx Glory is designed for quick and easy configuration.
- Made in die-cast aluminum, the adjustable structure allows the fixture tilt down 30° as required.
- Control gear options: on/off, Dali, 0-10V, phase dimming.




				
	DTB100F recessed	DTB10BF recessed	DTB125F recessed	DTB12BF recessed
General Information				
Optics	15°/24°/40° Adjustable	15°/24°/40° Adjustable	15°/24°/40° Adjustable	15°/24°/40° Adjustable
System Power (Watt)	9W	9W*2	16W	16W*2
System Luminous flux (lm)	650lm	650lmx2	1300lm	1300lmx2
Driver parameters	36V/210mA	36V/210mA	36V/390mA	36V/390mA
Cut out (mm)	100x100	200x100	125x125	260x125



Technical Details

Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistancy	SDCM<3
UGR	<16
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali

Dimensions (mm)

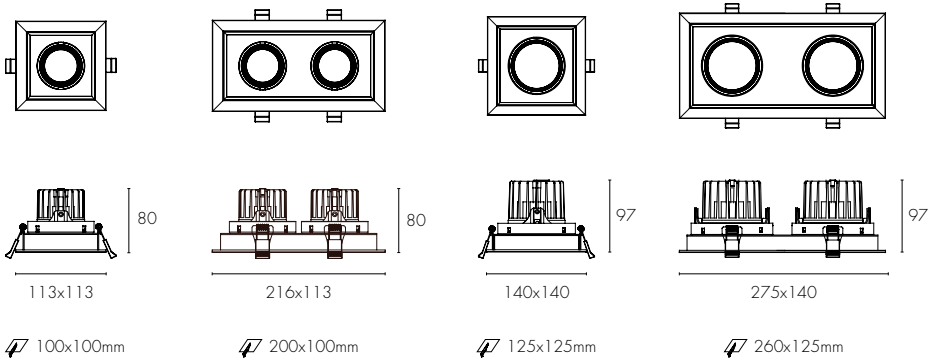


Finishes




PHOTOMETRIC


DTB100F 9W

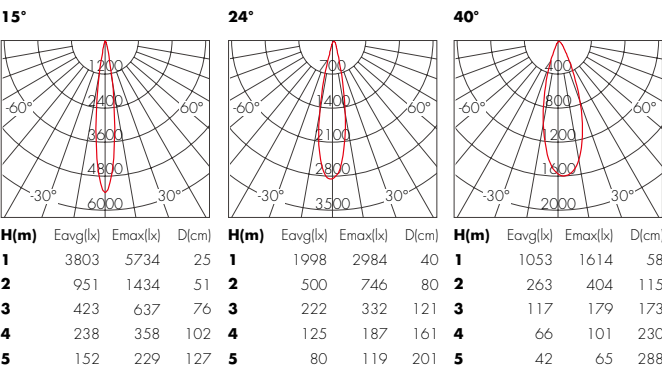

DTB10BF 9Wx2

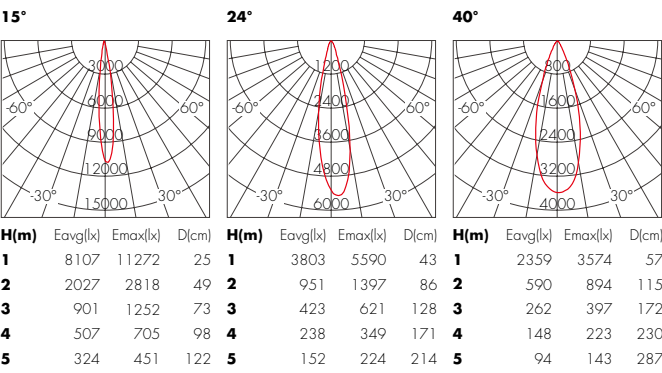

DTB125F 16W

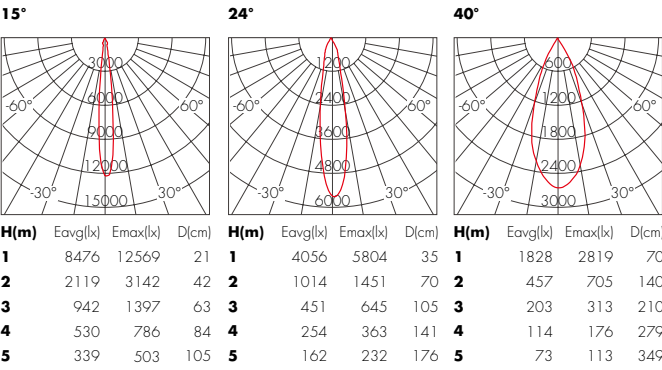

DTB12BF 16Wx2

