




GORDON Pendant

- The appearance of exquisite cylinder shape creates the visual impression of ultra minimalist.
- Deep recessed cut-off beam angle presents Gordon Pendant as an ideal solution for high contrast application.
- Distinctive finish colour can be customized to address architecture requirements.



Gordon Pendant



SLL060A
suspended

SLL060X
suspended

SLL040X
suspended



General Information

Optics	15°/24°/36° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed
System Power (Watt)	7W	7W	5W
System Luminous flux (lm)	350lm	300lm	230lm
Driver parameters	36V/160mA	36V/160mA	24V/160mA

Technical Details

Light Source	LED COB	LED SMD
Colour temperature	2700K/3000K/4000K	
CRI (Ra/R9)	RA>90/R9>50	
Colour Consistency	SDCM<3	SDCM<5
UGR	<16	
IP-rated	IP20	
Lifetime	>50,000h	
Warranty	3 Years/5 Years	
Driver	ON/OFF, Phase, 0-10V, Dali	

Dimensions (mm)




Finishes




White Black Titanium Gold Silver

PHOTOMETRIC

SLL060A 7W

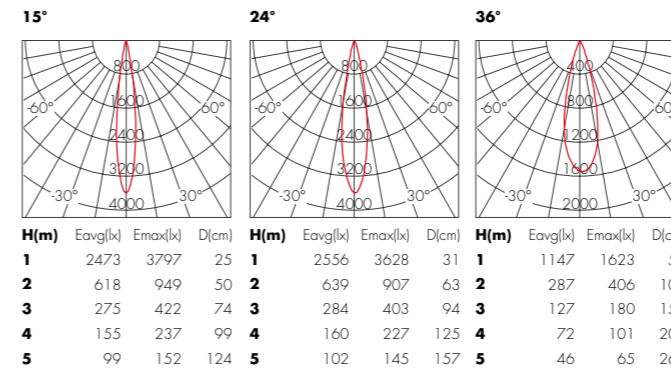

SLL060X 7W

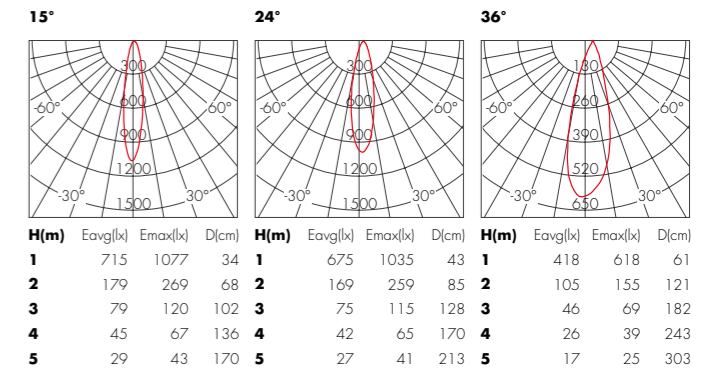

SLL040X 5W

