



GORDON Surface Mounted

- Surface-mounted structure, convenient for installation.
- Adopt darklight reflector, the excellent low-glare control provides high visual comfort for the applications.




					
	SAG078X surface	SAG092X surface	SAG104X surface	SAG057F surface	SAG077F surface
General Information					
Optics	15°/30° Fixed	15°/30° Fixed	24°/30° Fixed	24°/36° Fixed	24°/30° Fixed
System Power (Watt)	10W	15W	30W	10W	15W
System Luminous flux (lm)	720lm	980lm	2050lm	720lm	980lm
Driver parameters	36V/250mA	36V/350mA	36V/750mA	36V/250mA	36V/350mA

Technical Details

Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistancy	SDCM<3
UGR	<16
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali

Dimensions (mm)

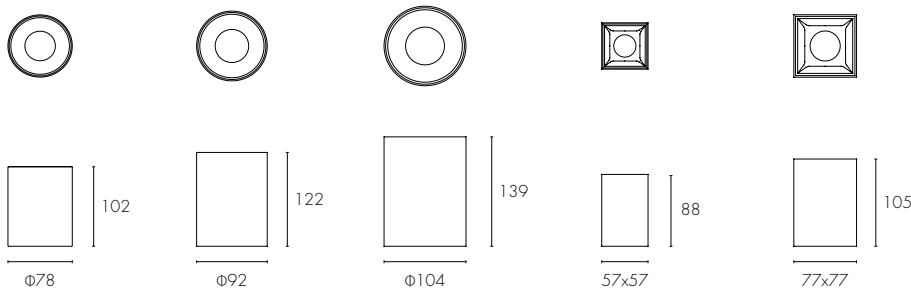

Finishes




White




Black

PHOTOMETRIC


SAG078X 10W

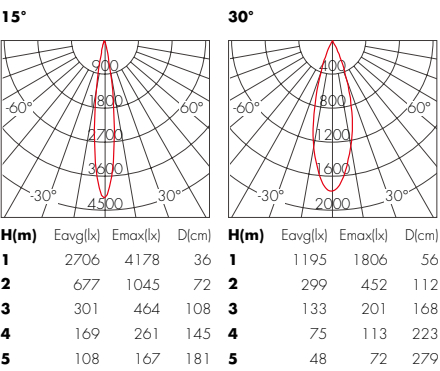


SAG092X 15W

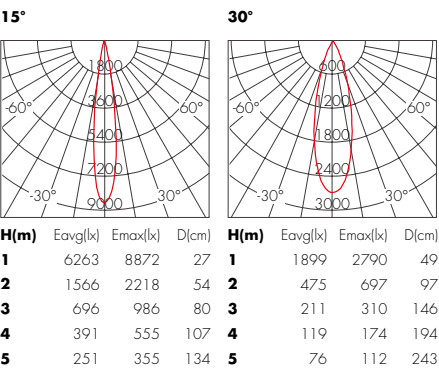

SAG104X 30W

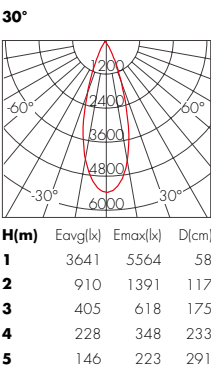

SAG057F 10W

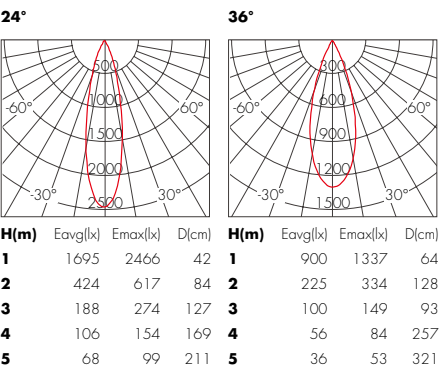

SAG077F 15W

