




TIA Eco Range

- Made in extruded aluminum, the driver is built-in on the back of the cylinder. It leaves an impression of simplicity and elegance.
- Outstanding anti-glare control with varied optic accessories empowers Tia meet different challenges for vertical lighting.

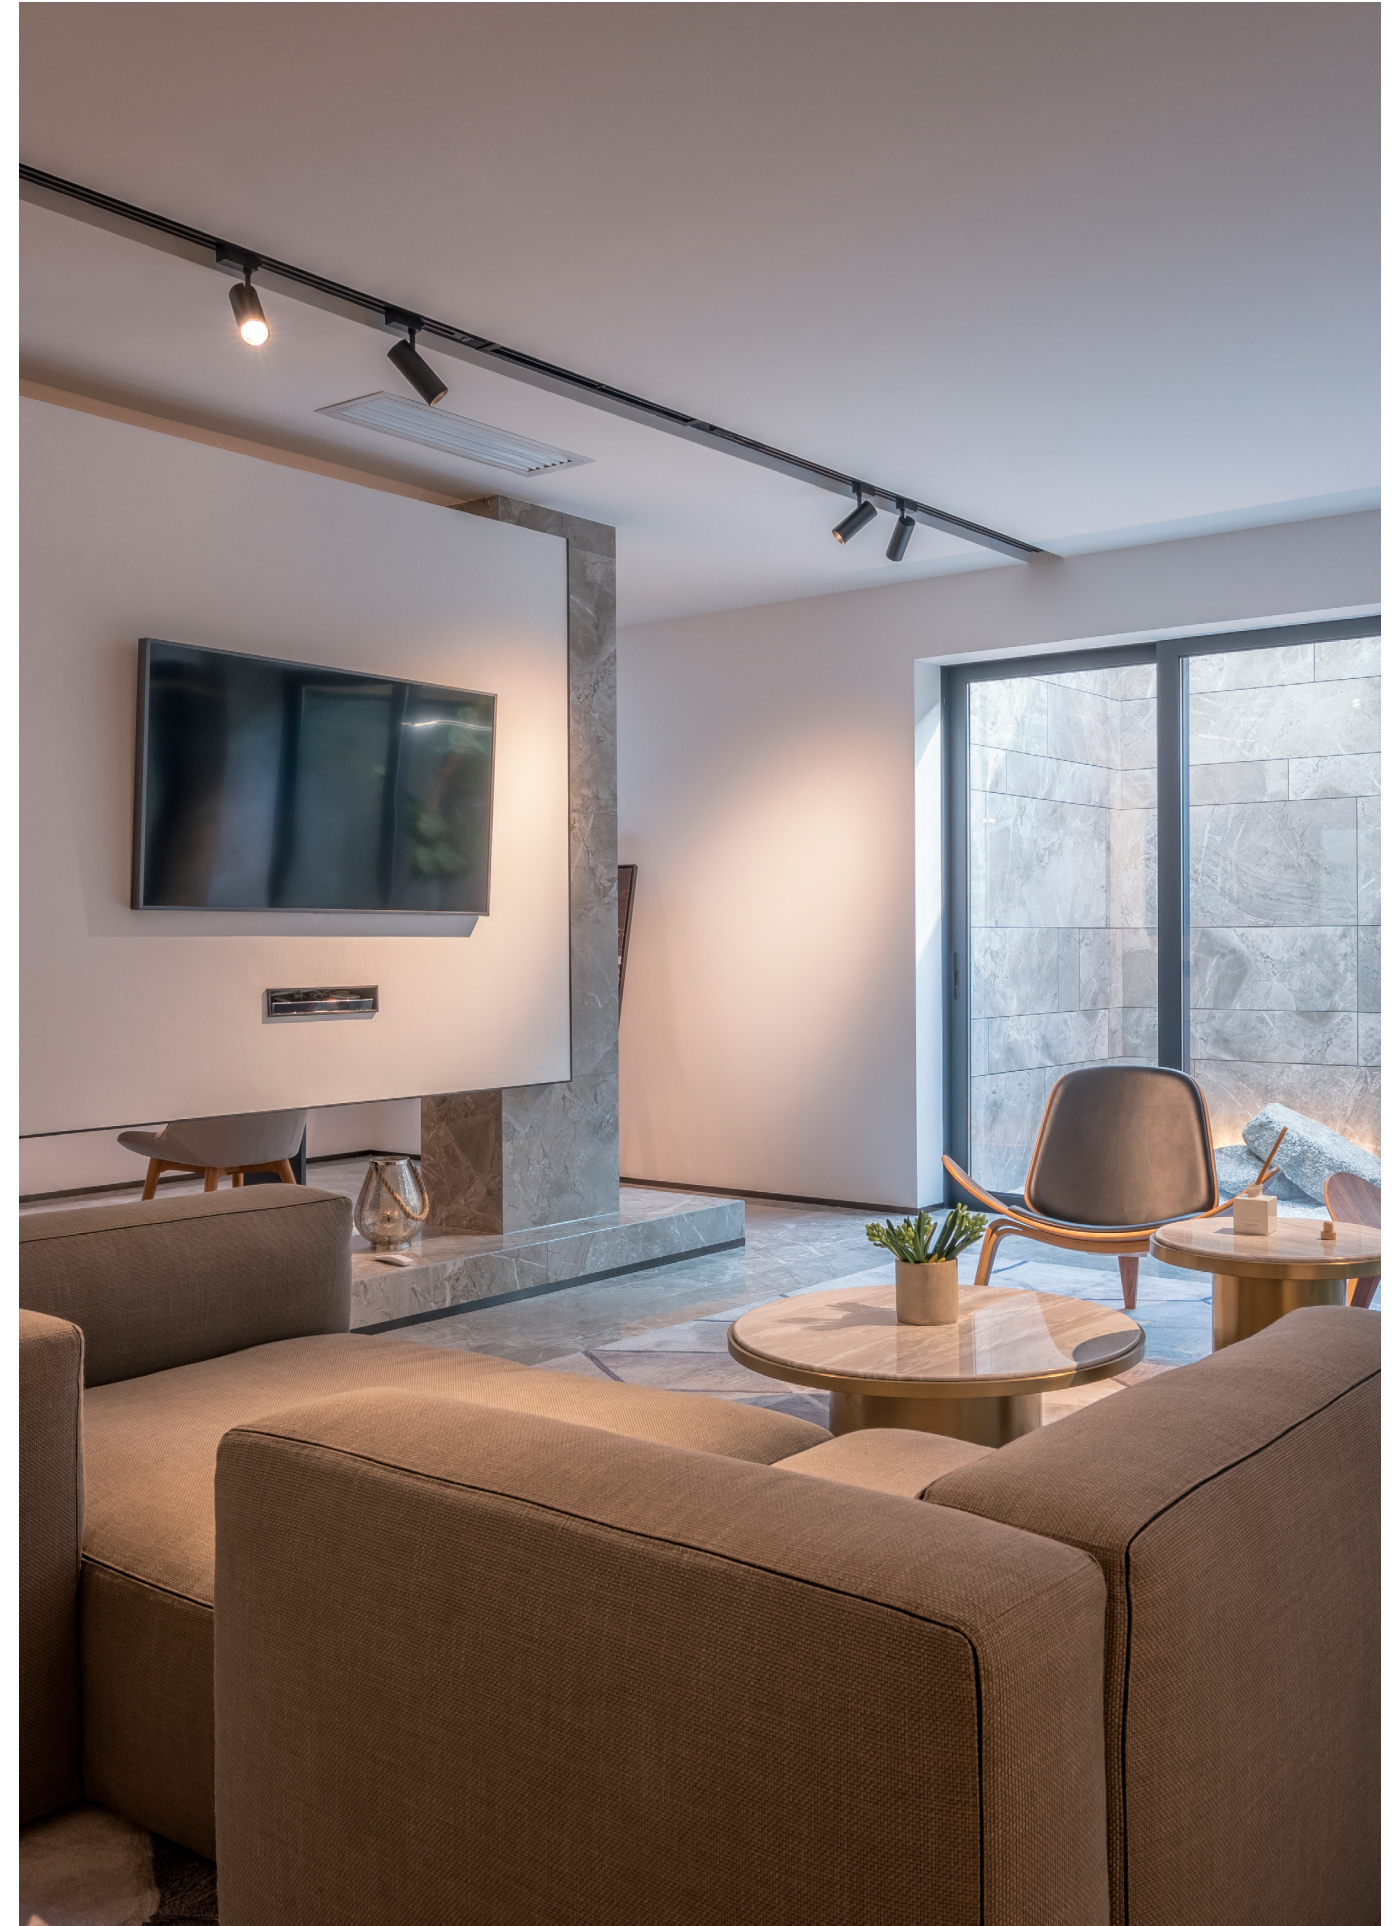


				
	TSL050F track	TSL060F track	TSL070F track	TSL080F track
General Information				
Optics	15°/24°/36°	15°/24°/36°	15°/24°/36°	15°/24°/36°
System Power (Watt)	9W	18W	24W	32W
System Luminous flux (lm)	720lm	1350lm	1850lm	2500lm
Driver parameters	120mA	210mA	280mA	240mA


Technical Details

Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistancy	SDCM<3
UGR	<19
IP-rated	IP20
Lifetime	>35,000h
Warranty	3 Years
Driver	ON/OFF
Options	2-Wire 1-Circuit Track / 3-Wires 1-Circuit Track / 4Wires 3-Circuit Track

Dimensions (mm)

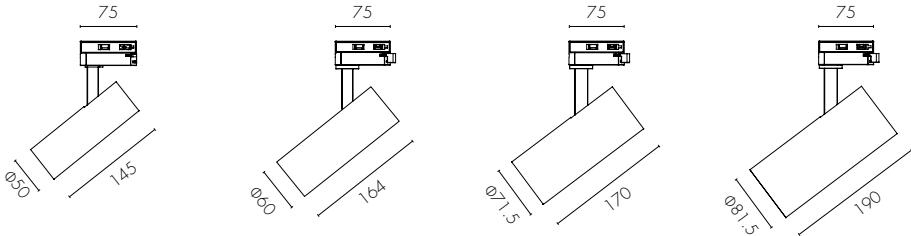

Finishes




White


Black

PHOTOMETRIC


TSL050F 9W

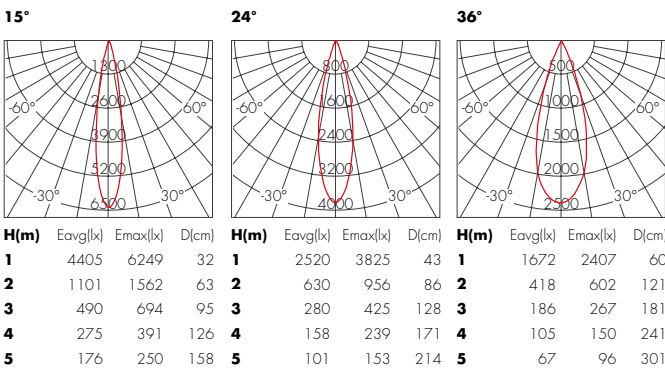

TSL060F 18W

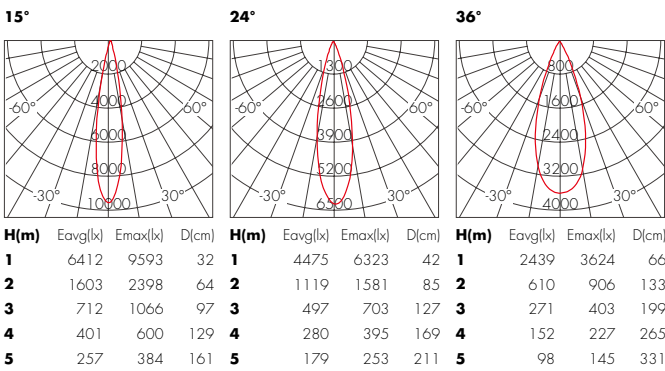

TSL070F 24W

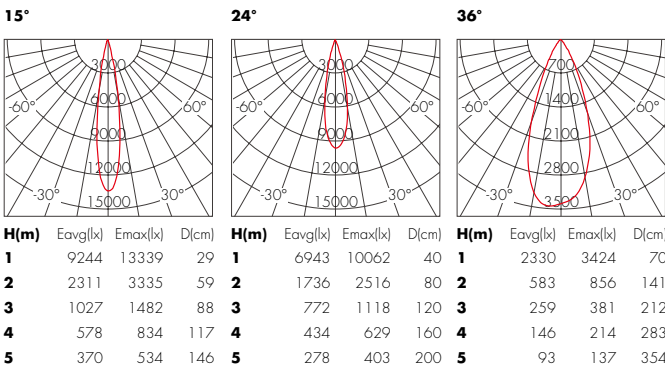

TSL080F 32W

