




HERA

- Hera is a family of recessed LED spots that comes in a wide range of different sizes and glare-limiting reflector finishes.
- Symmetrical or asymmetrical optics - either fixed or tiltable - are available.
- The variety of luminous flux, appearance options and dimming protocols present Hera as an unbeatable option for architectural lighting applications.



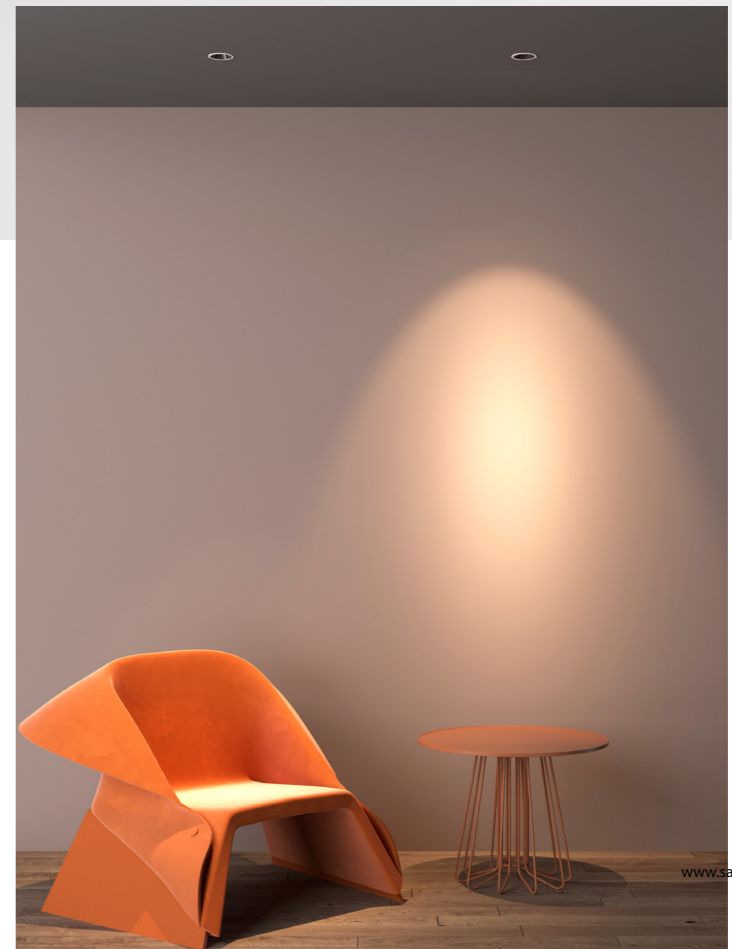


	DDI040Y recessed	DDI055Y recessed	DDI065Y recessed	DDI075Y recessed	DDI085Y recessed
General Information					
Optics	10°/15°/24° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed
System Power (Watt)	5W	5W	7W	9W	15W
System Luminous flux (lm)	250lm	300lm	500lm	680lm	1050lm
Driver parameters	3V/1000mA	36V/110mA	36V/160mA	36V/210mA	36V/360mA
Cut out (mm)	Φ40	Φ55	Φ65	Φ75	Φ85

Technical Details


Light Source	LED SMD	LED COB
Colour temperature	2700K/3000K/4000K	
CRI (Ra/R9)	RA>90/R9>50	
Colour Consistency	SDCM<5	SDCM<3
UGR	<16	
IP-rated	IP20	
Lifetime	>50,000h	
Warranty	3 Years/5 Years	
Driver	ON/OFF, Phase, 0-10V, Dali	

Dimensions (mm)

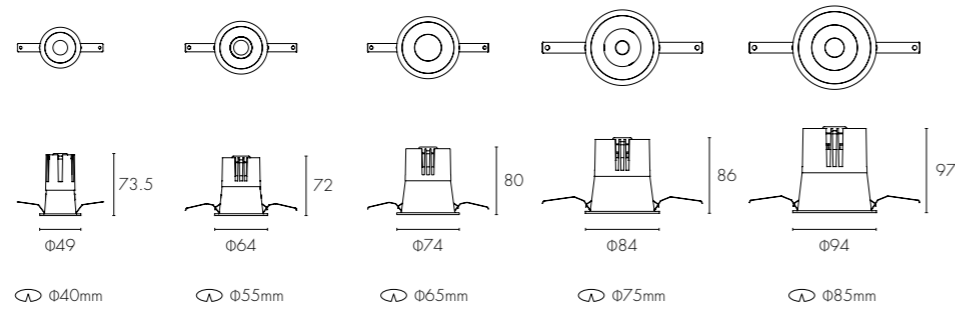


PHOTOMETRIC


DDI040Y 5W

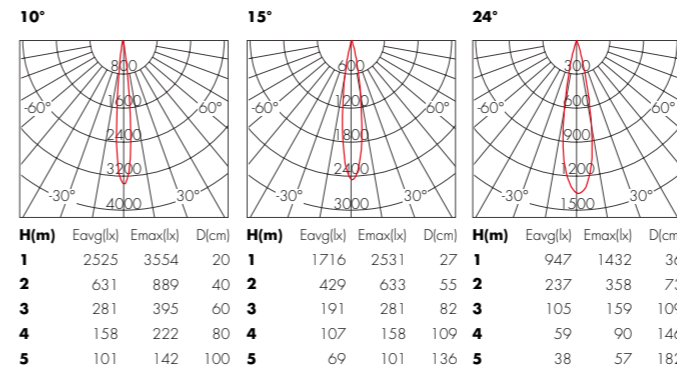


DDI055Y 5W

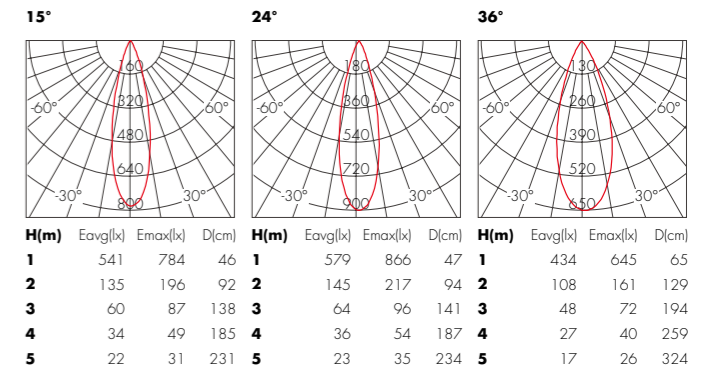


DDI065Y 7W

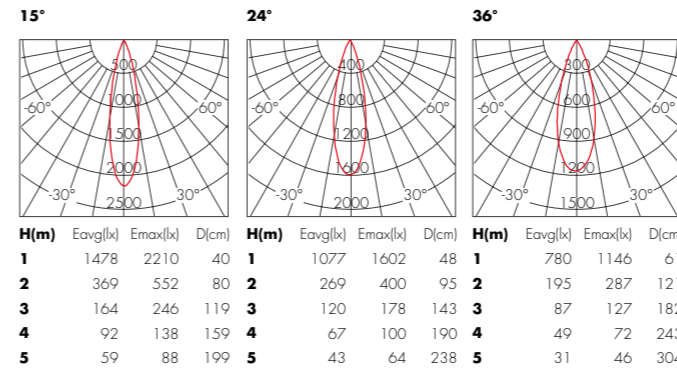


DDI075Y 9W

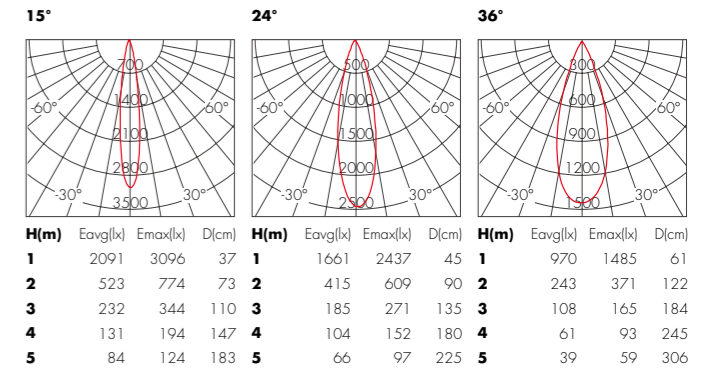


DDI085Y 15W

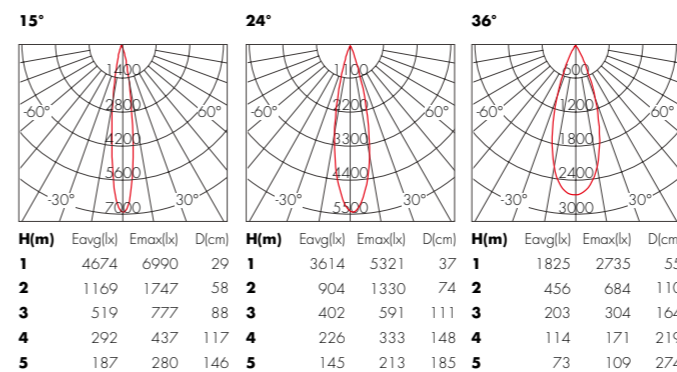


Accessories

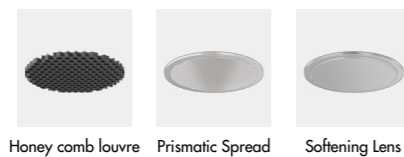

Secondary Reflector

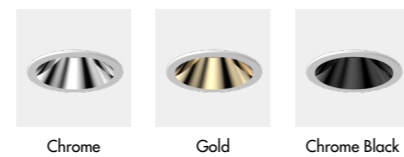

Colour Filter

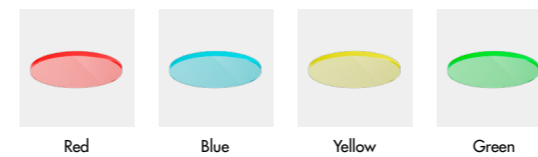




	DDI065X recessed	DDI075X recessed	DDI085X recessed	DSI075X recessed	DSI075T recessed
General Information					
Optics	15°/24°/36° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed	15°/24°/36° Adjustable	15°/24°/36° Adjustable
System Power (Watt)	5W	7W	9W	7W	7W
System Luminous flux (lm)	280lm	500lm	700lm	500lm	420lm
Driver parameters	36V/110mA	36V/160mA	36V/210mA	36V/160mA	36V/160mA
Cut out (mm)	Φ65	Φ75	Φ85	Φ75	Φ75

Technical Details


Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistency	SDCM<3
UGR	<16
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali

Dimensions (mm)

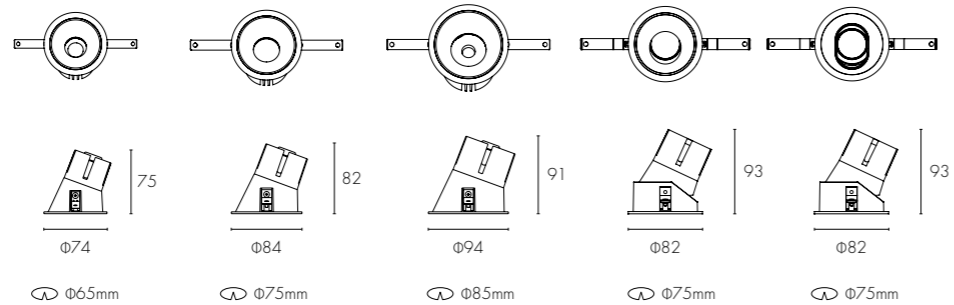


PHOTOMETRIC


DDI065X 5W

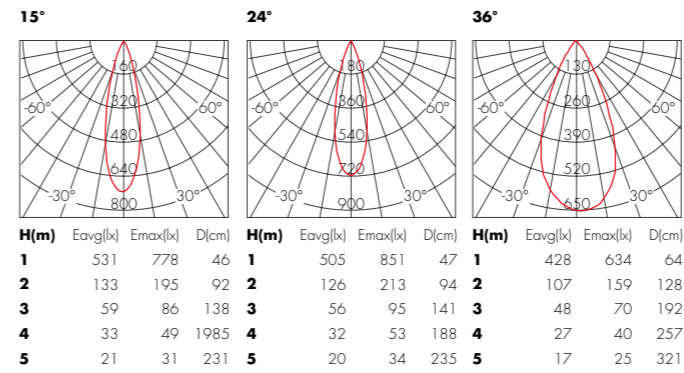


DDI075X 7W

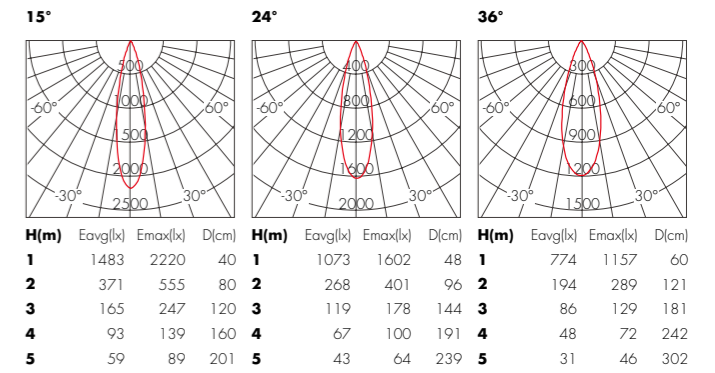


DDI085X 9W

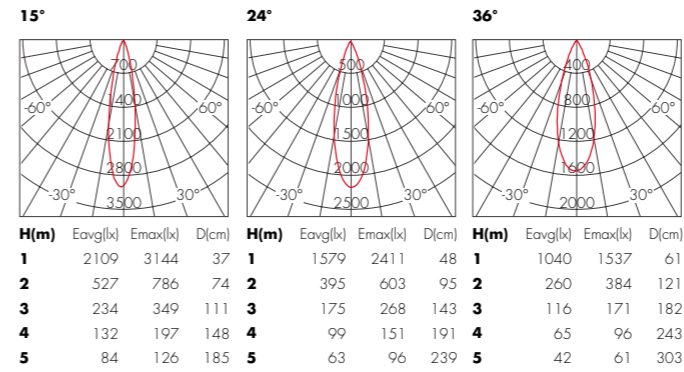


DSI075X 7W

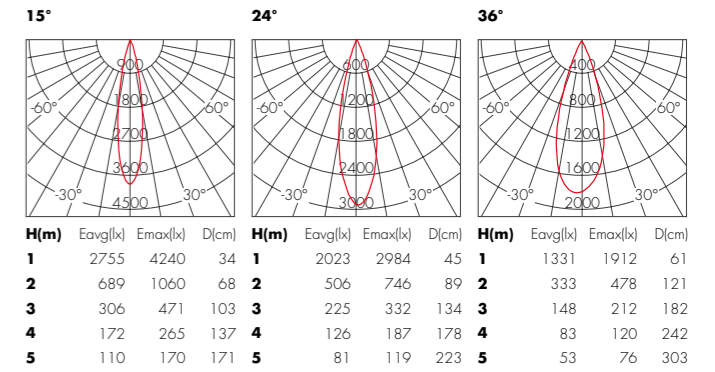


DSI075T 7W

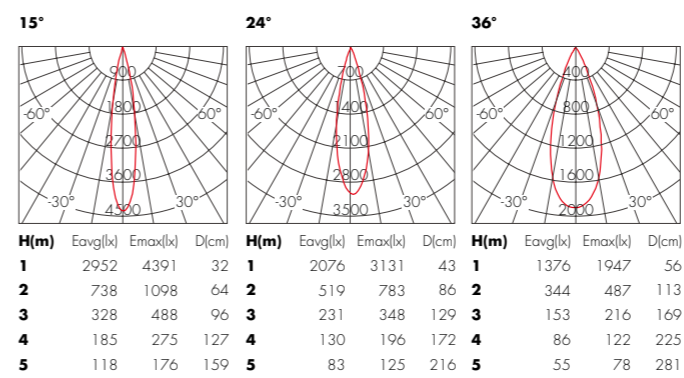


Accessories

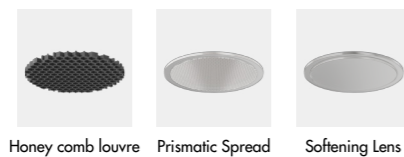

Secondary Reflector

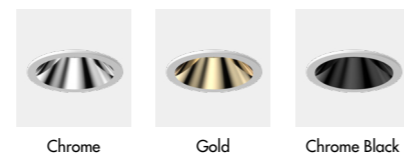

Colour Filter

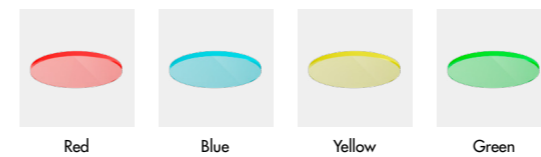



DDI040D recessed **DDI055D** recessed **DDI065D** recessed **DDI075D** recessed **DDI085D** recessed


General Information

Optics	10°/15°/24° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed
System Power (Watt)	5W	5W	7W	9W	15W
System Luminous flux (lm)	250lm	300lm	500lm	680lm	1050lm
Driver parameters	3V/1000mA	36V/110mA	36V/160mA	36V/210mA	36V/360mA
Cut out (mm)	Φ40	Φ55	Φ65	Φ75	Φ85

Technical Details


Light Source	LED SMD	LED COB
Colour temperature	2700K/3000K/4000K	
CRI (Ra/R9)	RA>90/R9>50	
Colour Consistency	SDCM<5	SDCM<3
UGR	<16	
IP-rated	IP20	
Lifetime	>50,000h	
Warranty	3 Years/5 Years	
Driver	ON/OFF, Phase, 0-10V, Dali	

Dimensions (mm)

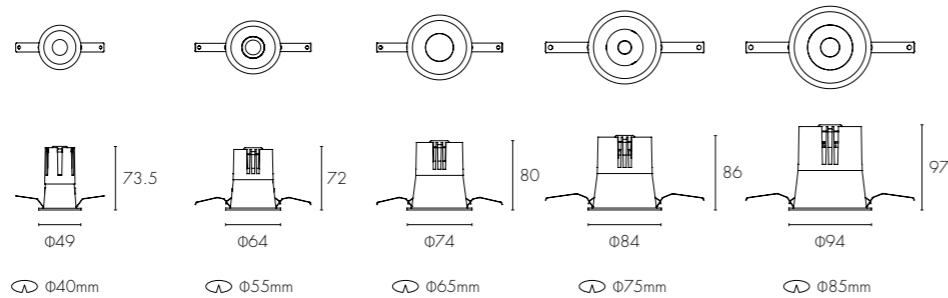


PHOTOMETRIC


DDI040D 5W

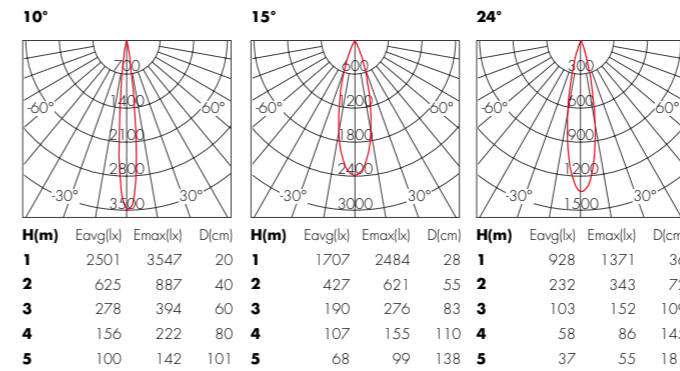


DDI055D 5W

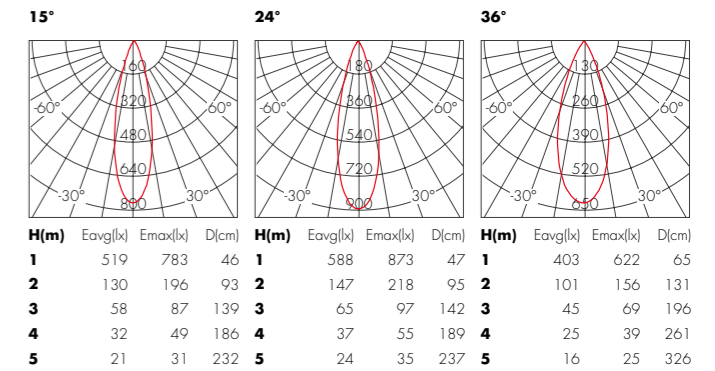


DDI065D 7W

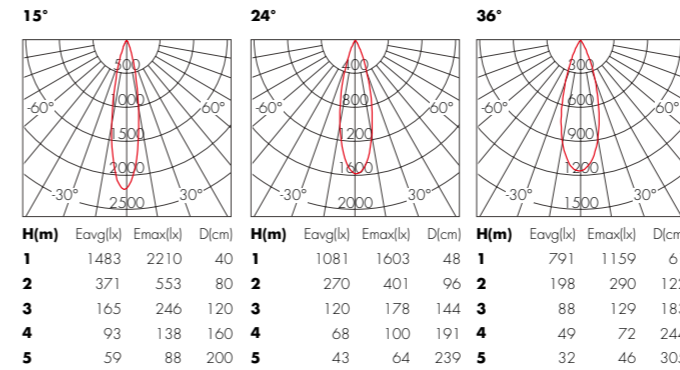

DDI075D 9W

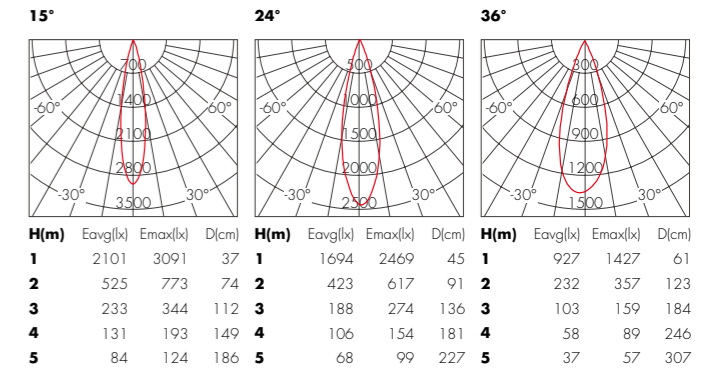

DDI085D 15W

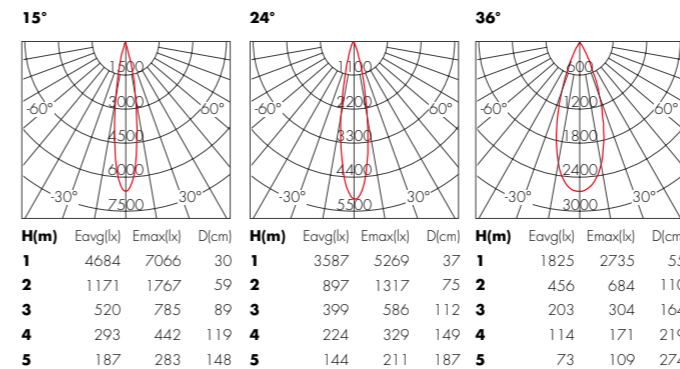

Accessories




Honey comb louvre Prismatic Spread Softening Lens

Finishes



White Black

Colour Filter

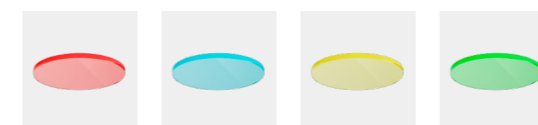

Red Blue Yellow Green




	DDIO40F recessed	DDIO55F recessed	DDIO65F recessed	DDIO75F recessed	DDIO85F recessed
General Information					
Optics	10°/15°/24° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed
System Power (Watt)	5W	5W	7W	9W	15W
System Luminous flux (lm)	250lm	300lm	500lm	680lm	1050lm
Driver parameters	3V/1000mA	36V/110mA	36V/160mA	36V/210mA	36V/360mA
Cut out (mm)	40x40	55x55	65x65	75x75	85x85

Technical Details


Light Source	LED SMD	LED COB
Colour temperature	2700K/3000K/4000K	
CRI (Ra/R9)	RA>90/R9>50	
Colour Consistency	SDCM<5	SDCM<3
UGR	<16	
IP-rated	IP20	
Lifetime	>50,000h	
Warranty	3 Years/5 Years	
Driver	ON/OFF, Phase, 0-10V, Dali	

Dimensions (mm)

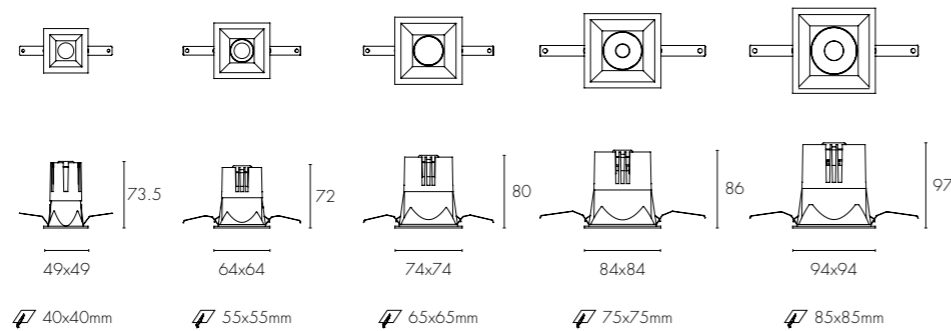


PHOTOMETRIC


DDIO40F 5W

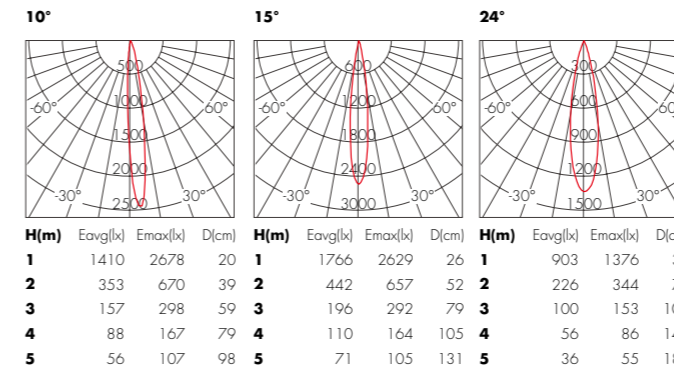


DDIO55F 5W

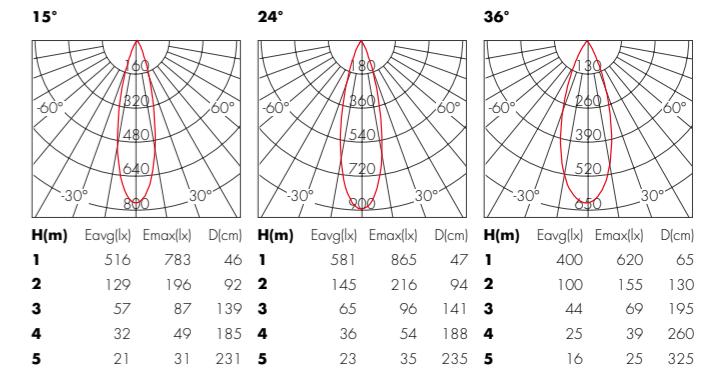


DDIO65F 7W

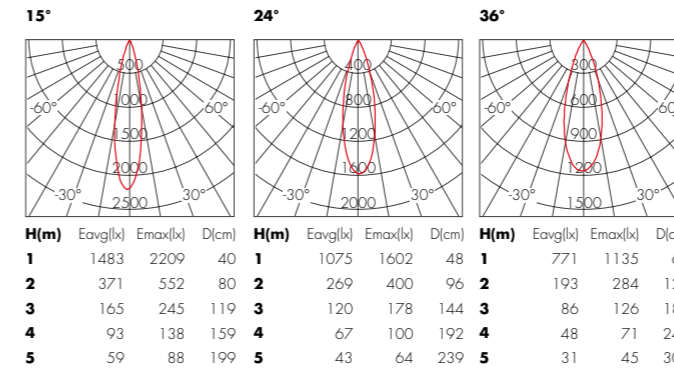

DDIO75F 9W

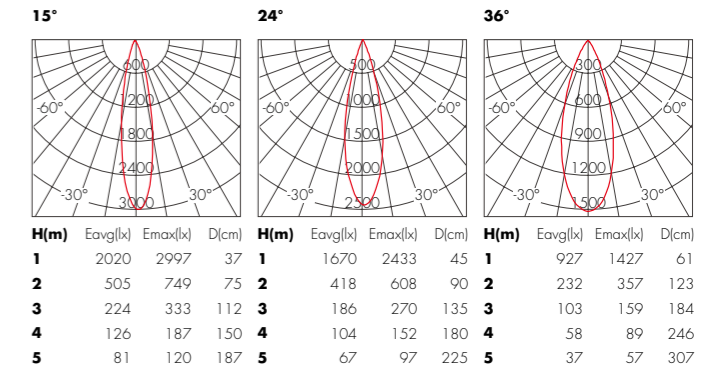

DDIO85F 15W

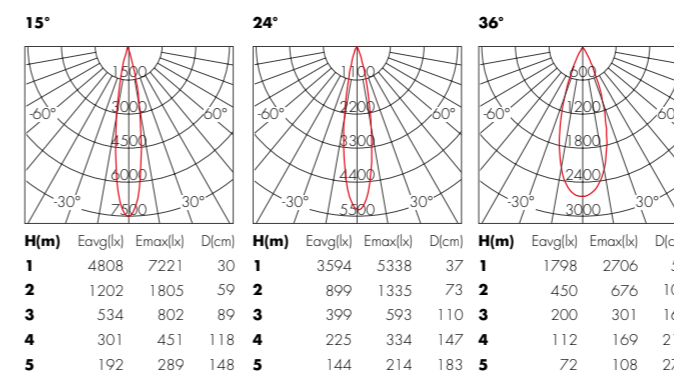


Accessories




Honey comb louvre | Prismatic Spread | Softening Lens

Finishes



White | Black

Colour Filter

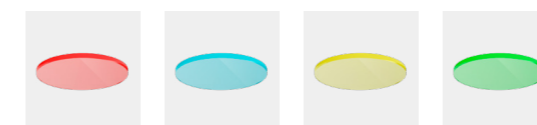

Red | Blue | Yellow | Green



DDI065Z
recessed

DDI075Z
recessed

DDI085Z
recessed


General Information

Optics	15°/24°/36° Fixed	15°/24°/36° Fixed	15°/24°/36° Fixed
System Power (Watt)	5W	7W	9W
System Luminous flux (lm)	280lm	500lm	700lm
Driver parameters	36V/110mA	36V/160mA	36V/210mA
Cut out (mm)	65x65	75x75	85x85

Technical Details


Light Source	LED COB
Colour temperature	2700K/3000K/4000K
CRI (Ra/R9)	RA>90/R9>50
Colour Consistency	SDCM<3
UGR	<16
IP-rated	IP20
Lifetime	>50,000h
Warranty	3 Years/5 Years
Driver	ON/OFF, Phase, 0-10V, Dali

Dimensions (mm)

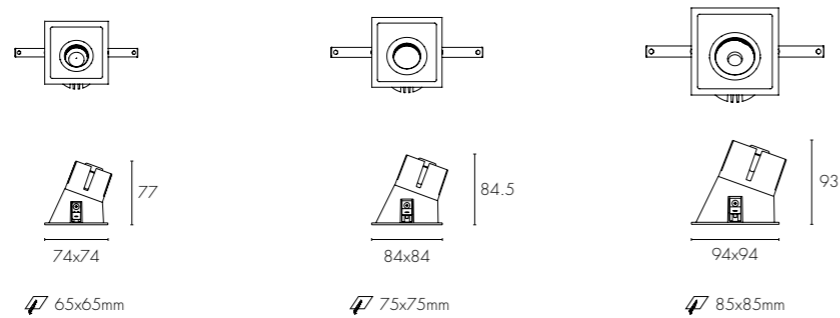


PHOTOMETRIC


DDI065Z 5W

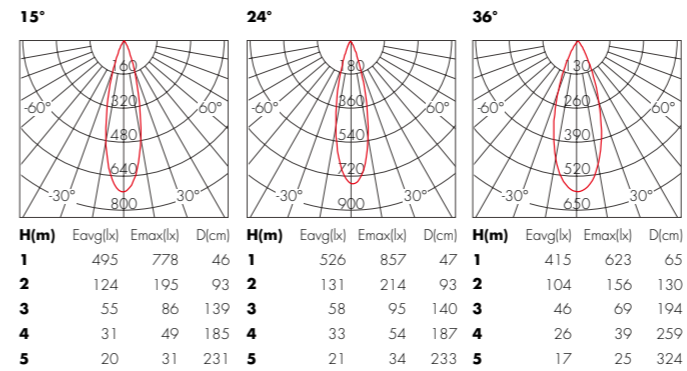


DDI075Z 7W

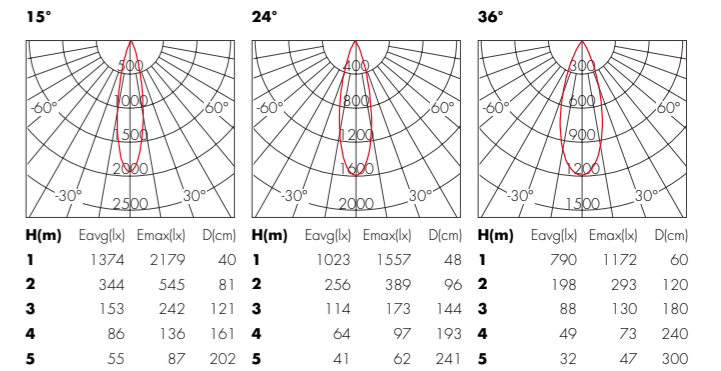

DDI085Z 9W

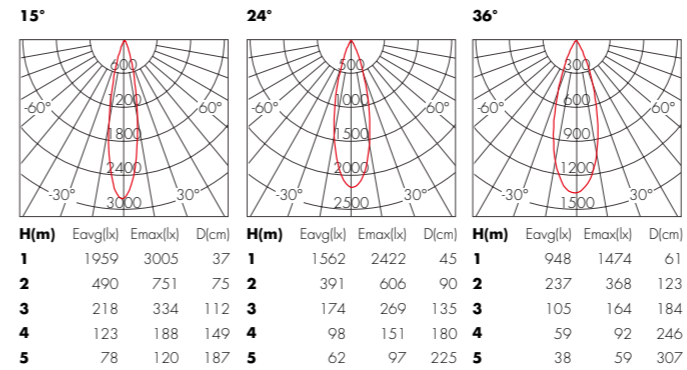

Accessories

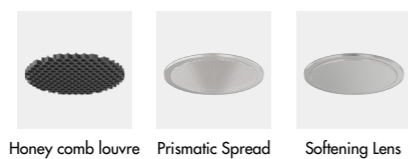

Finishes



Colour Filter

